


MONTAGE ATF®

WELDED RESIDENTIAL ORNAMENTAL FENCE

TYPICAL PANEL DRAWING
(Classic Style shown; Genesis, Majestic, Warrior, Crescent and Gemini also available)

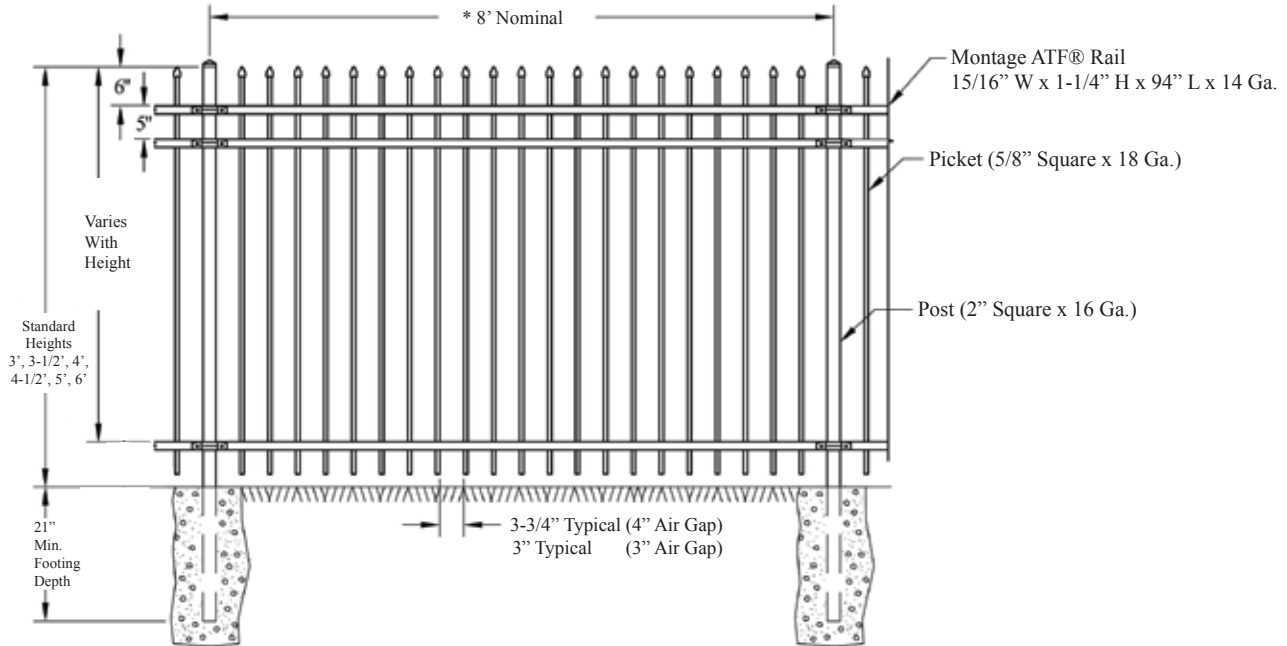

*** Refer to Construction Specification Table on Page 1-8 for recommended (Post Spacing by Bracket Type)**

E-Coat™ PROTECTION

UNIQUE PROFUSION WELDING PROCESS
PATENT D466,620 6,811,145 7,071,439

ATF® RACKABLE DESIGN
PATENT D466,621 7,071,439



- AUTOMATICALLY FUSION WELDED AT ALL INTERSECTIONS
- NO EXPOSED WELDS - VIRTUALLY SEAMLESS APPEARANCE
- GOOD NEIGHBOR PROFILE - SAME ON BOTH SIDES
- CONSISTENTLY HIGH QUALITY LEVEL - EVERY PANEL
- ZINC-PHOSPHATIZED GALVANIZED STEEL BASE MATERIAL




MONTAGE ATF® PANELS




1-888-333-3422
FAX: 1-877-926-3747

2-Rail (Standard) 4" Air Gap


CLASSIC




GENESIS




MAJESTIC



WARRIOR



CRESCENT



(Not Rackable)

(NOMINAL) PANEL HEIGHT	ITEM NUMBER	PANEL WEIGHT	PALLET QUANTITY	STOCKING STYLE/COLOR
3' H	R <u>*</u> <u>X</u> 234	30	40	MAJ/BLK
3-1/2' H	R <u>*</u> <u>X</u> 240	33	40	MAJ/BLK
4' H	R <u>*</u> <u>X</u> 246	36	40	MAJ, CLS, GEN/BLK & MAJ/BRZ
5' H	R <u>*</u> <u>X</u> 258	43	40	MAJ, CLS, GEN/BLK


STYLE SELECTION = * X = **COLOR SELECTION**

CLASSIC = C B = BLACK
 GENESIS = G N = BRONZE
 MAJESTIC = M
 WARRIOR = W
 CRESCENT = L
 GEMINI = N/A IN 4" AIR GAP

(8' Nominal) 94" Actual Panel Width
 5/8" Sq x 18 Ga. Picket = (21 - Pickets per Panel)

3" Air Gap

MAJESTIC



GEMINI



(Not Rackable)

(NOMINAL) PANEL HEIGHT	ITEM NUMBER	PANEL WEIGHT	PALLET QUANTITY	STOCKING STYLE/COLOR
3' H	R <u>*</u> <u>X</u> 234-3	34	40	N/A
3-1/2' H	R <u>*</u> <u>X</u> 240-3	38	40	N/A
4' H	R <u>*</u> <u>X</u> 246-3	44	40	N/A

STYLE SELECTION = * X = **COLOR SELECTION**

MAJESTIC = M B = BLACK
 GEMINI = H N = BRONZE
 CLASSIC = N/A IN 3" AIR GAP
 GENESIS = N/A IN 3" AIR GAP
 WARRIOR = N/A IN 3" AIR GAP
 CRESCENT = N/A IN 3" AIR GAP

(8' Nominal) 94" Actual Panel Width
 5/8" Sq x 18 Ga. Picket = (26 - Pickets per Panel)

* Non-Stocking panel styles/colors must be purchased in full pallet quantities.
 * Genesis panels in both Black and Bronze are packaged with (Black) 5/8" Sq picket plugs.


**MONTAGE ATF®
PANELS**




1-888-333-3422
FAX: 1-877-926-3747

**2-Rail (Flush Bottom)
4" Air Gap**


CLASSIC




GENESIS



MAJESTIC



WARRIOR



CRESCENT




(Not Rackable)

(NOMINAL) PANEL HEIGHT	ITEM NUMBER	PANEL WEIGHT	PALLET QUANTITY	STOCKING STYLE/COLOR
3' H	R * <u>X</u> 234F	30	40	MAJ/BLK
3-1/2' H	R * <u>X</u> 240F	33	40	MAJ/BLK
4' H	R * <u>X</u> 246F	36	40	MAJ/BLK
5' H	R * <u>X</u> 258F	43	40	MAJ/BLK

STYLE SELECTION = * X = **COLOR SELECTION** (8' Nominal) 94" Actual Panel Width
 CLASSIC = C B = BLACK 5/8" Sq x 18 Ga. Picket = (21 - Pickets per Panel)
 GENESIS = G N = BRONZE
 MAJESTIC = M
 WARRIOR = W
 CRESCENT = L
 GEMINI = N/A IN 4" AIR GAP

3" Air Gap

MAJESTIC



GEMINI



(Not Rackable)

(NOMINAL) PANEL HEIGHT	ITEM NUMBER	PANEL WEIGHT	PALLET QUANTITY	STOCKING STYLE/COLOR
3' H	R * <u>X</u> 234F-3	34	40	N/A
3-1/2' H	R * <u>X</u> 240F-3	38	40	N/A
4' H	R * <u>X</u> 246F-3	44	40	MAJ/BLK

STYLE SELECTION = * X = **COLOR SELECTION** (8' Nominal) 94" Actual Panel Width
 MAJESTIC = M B = BLACK 5/8" Sq x 18 Ga. Picket = (26 - Pickets per Panel)
 GEMINI = H N = BRONZE
 CLASSIC = N/A IN 3" AIR GAP
 GENESIS = N/A IN 3" AIR GAP
 WARRIOR = N/A IN 3" AIR GAP
 CRESCENT = N/A IN 3" AIR GAP

* Non-Stocking panel styles/colors must be purchased in full pallet quantities.
 * Genesis panels in both Black and Bronze are packaged with (Black) 5/8" Sq picket plugs.


**MONTAGE ATF®
PANELS**




1-888-333-3422
FAX: 1-877-926-3747

**3-Rail (Standard)
4" Air Gap**


CLASSIC



GENESIS




MAJESTIC



WARRIOR



CRESCENT



(NOMINAL) PANEL HEIGHT	ITEM NUMBER	PANEL WEIGHT	PALLET QUANTITY	STOCKING STYLE/COLOR
3' H	R <u>*</u> <u>X</u> 334	35	40	MAJ, CLS, GEN/BLK
3-1/2' H	R <u>*</u> <u>X</u> 340	39	40	MAJ, CLS, GEN/BLK
4' H	R <u>*</u> <u>X</u> 346	42	40	MAJ, CLS, GEN, WAR, CRE/BLK & MAJ, GEN/BRZ
5' H	R <u>*</u> <u>X</u> 358	49	40	MAJ, CLS, GEN, WAR/BLK & MAJ, CLS/BRZ
6' H	R <u>*</u> <u>X</u> 370	55	40	MAJ, CLS, GEN, WAR/BLK & CLS, GEN/BRZ


STYLE SELECTION = * **X = COLOR SELECTION**

CLASSIC = **C** **B** = BLACK
 GENESIS = **G** **N** = BRONZE
 MAJESTIC = **M**
 WARRIOR = **W**
 CRESCENT = **L**
 GEMINI = N/A IN 4" AIR GAP


(8' Nominal) 94" Actual Panel Width
 5/8" Sq x 18 Ga. Picket = (21 - Pickets per Panel)

3" Air Gap

CLASSIC




GENESIS



MAJESTIC



GEMINI



(NOMINAL) PANEL HEIGHT	ITEM NUMBER	PANEL WEIGHT	PALLET QUANTITY	STOCKING STYLE/COLOR
3' H	R <u>*</u> <u>X</u> 334-3	40	40	N/A
3-1/2' H	R <u>*</u> <u>X</u> 340-3	44	40	N/A
4' H	R <u>*</u> <u>X</u> 346-3	50	40	MAJ, CLS, GEN/BLK
5' H	R <u>*</u> <u>X</u> 358-3	55	40	MAJ, CLS/BLK
6' H	R <u>*</u> <u>X</u> 370-3	62	40	MAJ, CLS/BLK

STYLE SELECTION = * **X = COLOR SELECTION**

CLASSIC = **C** **B** = BLACK
 GENESIS = **G** **N** = BRONZE
 MAJESTIC = **M**
 GEMINI = **H**
 WARRIOR = N/A IN 3" AIR GAP
 CRESCENT = N/A IN 3" AIR GAP

(8' Nominal) 94" Actual Panel Width
 5/8" Sq x 18 Ga. Picket = (26 - Pickets per Panel)

* Non-Stocking panel styles/colors must be purchased in full pallet quantities.
 * Genesis panels in both Black and Bronze are packaged with (Black) 5/8" Sq picket plugs.


**MONTAGE ATF®
PANELS**




1-888-333-3422
FAX: 1-877-926-3747

**3-Rail (Flush Bottom)
4" Air Gap**


CLASSIC



GENESIS



MAJESTIC



WARRIOR



CRESCENT



(Not Rackable)

(NOMINAL) PANEL HEIGHT	ITEM NUMBER	PANEL WEIGHT	PALLET QUANTITY	STOCKING STYLE/COLOR
3' H	R * <u>X</u> 334F	35	40	MAJ/BLK
3-1/2' H	R * <u>X</u> 340F	39	40	MAJ/BLK
4' H	R * <u>X</u> 346F	42	40	MAJ/BLK
4-1/2' H	R <u>M</u> <u>X</u> 354F	48	40	(ONLY AVAILABLE IN MAJ) BLK
5' H	R * <u>X</u> 358F	49	40	MAJ, CLS, GEN/BLK
6' H	R * <u>X</u> 370F	55	40	MAJ, CLS/BLK


STYLE SELECTION = * X = **COLOR SELECTION**

CLASSIC = C B = BLACK
 GENESIS = G N = BRONZE
 MAJESTIC = M
 WARRIOR = W
 CRESCENT = L
 GEMINI = N/A IN 4" AIR GAP


(8' Nominal) 94" Actual Panel Width
 5/8" Sq x 18 Ga. Picket = (21 - Pickets per Panel)

3" Air Gap

CLASSIC



GENESIS



MAJESTIC



GEMINI



(Not Rackable)

(NOMINAL) PANEL HEIGHT	ITEM NUMBER	PANEL WEIGHT	PALLET QUANTITY	STOCKING STYLE/COLOR
3' H	R * <u>X</u> 334F-3	40	40	N/A
3-1/2' H	R * <u>X</u> 340F-3	44	40	N/A
4' H	R * <u>X</u> 346F-3	50	40	MAJ/BLK
4-1/2' H	R <u>M</u> <u>X</u> 354F-3	55	40	(ONLY AVAILABLE IN MAJ) N/A
5' H	R * <u>X</u> 358F-3	56	40	N/A
6' H	R * <u>X</u> 370F-3	63	40	N/A

STYLE SELECTION = * X = **COLOR SELECTION**

CLASSIC = C B = BLACK
 GENESIS = G N = BRONZE
 MAJESTIC = M
 GEMINI = H
 WARRIOR = N/A IN 3" AIR GAP
 CRESCENT = N/A IN 3" AIR GAP

(8' Nominal) 94" Actual Panel Width
 5/8" Sq x 18 Ga. Picket = (26 - Pickets per Panel)








* Non-Stocking panel styles/colors must be purchased in full pallet quantities.
 * Genesis panels in both Black and Bronze are packaged with (Black) 5/8" Sq picket plugs.

MONTAGE ATF®










1-888-333-3422
FAX: 1-877-926-3747

BRACKETS

ITEM DESCRIPTION	BLACK		COLOR		BAG QTY	BOX QTY	WT EA.
	BLACK PART NO.	DEALER PRICE	BRONZE PART NO.	DEALER PRICE			
Montage Universal Boulevard Bracket 	BB102		BN102		2	100	.27
Made from high strength stainless steel. Packaged in polybag with #10 x 3/4" self-drilling screws, 1/4" x 1-1/2" carriage bolts and 1/4" flange nuts. Works universally for lines, ends, and corners. Packaged 2 per bag. MUST BE ORDERED IN BAG QUANTITIES.							
  							
Montage Line Bracket 	BB104		BN104		2	80	.47
Made from high strength stainless steel. Used as boulevard bracket around a 2" post to join two adjacent panels in line. Packaged in polybag with #10 x 3/4" self-drilling screws, 1/4" x 1-1/2" carriage bolts and 1/4" flange nuts. Packaged 2 per bag. MUST BE ORDERED IN BAG QUANTITIES.							
Montage Flat Mount Bracket 	BB105		BN105		2	150	.15
Made from high strength stainless steel. Can be used to attach panels to walls, wood posts, etc. Packaged in polybag with #14 x 3/4" self-drilling screws, 1/4" x 1-1/2" carriage bolts and 1/4" flange nuts. Packaged 2 per bag. MUST BE ORDERED IN BAG QUANTITIES.							
Montage Swivel Bracket 	BB106		BN106		2	76	.20
Heavy-duty cast aluminum. For oblique angles. Packaged in polybag with #10 x 3/4" self-drilling screws and #10 x 5/8" flat head phillips screw. Packaged 2 per bag. MUST BE ORDERED IN BAG QUANTITIES.							

ADORNMENTS™






ITEM DESCRIPTION	PART NUMBER				SIZE	UNIT OF MEASURE	WT EA.
	BLACK PART NO.	DEALER PRICE	BRONZE PART NO.	DEALER PRICE			
Quad-Flare 	AB301	1.10	AN301	1.10	5/8"	Ea.	.2
Fits atop 5/8" square pickets (press-fit). Heavy-duty cast aluminum. The four-sided flare design supports the popular traditional look when added to "Genesis" style panels (21 required per panel on standard 4" Air Gap spacing; 26 required per panel on condensed 3" Air Gap spacing).							
Triad 	AB302	1.10	AN302	1.10	5/8"	Ea.	.2
Fits atop 5/8" square pickets (press-fit). Heavy-duty cast aluminum. Three distinct tips reflect the strong look of a barbed spear when added to "Genesis" style panels (21 required per panel on standard 4" Air Gap spacing; 26 required per panel on condensed 3" Air Gap spacing).							
Serpentine Scroll 	HB059	4.38	HN059	4.38	----	Ea.	.75
Fits onto the face of 5/8" square pickets. Die cast aluminum. Can be mounted in a line between the top rails of 3-rail panels or grouped in Arched Swing Gates. Furnished with #10 x 3/4" self-drilling screws. (11 required per panel). Not available for 3" Air Gap spacing.							
Butterfly Scroll 	HB058	2.24	HN058	2.24	----	Ea.	.2
Fits onto the face of 5/8" square pickets. Die cast aluminum. Can be mounted in a line between the top rails of 3-rail panels or grouped in Arched Swing Gates. Furnished with #10 x 3/4" self-drilling screws. (11 required per panel). Not available for 3" Air Gap spacing.							
Double Ring 	AB102	3.92	AN102 (N/S)	4.12	----	Ea.	.7
Fits onto the face of 5/8" square pickets. Die cast aluminum. Can be mounted in a line between the top rails of 3-rail panels to give the look of ornamental circle. Furnished with #14 x 3/4" self-drilling screws. (11 required per panel). Not available for 3" Air Gap spacing.							
Corona 	AB103	1.42	AN103 (N/S)	1.42	----	Ea.	.35
Fits onto face of 5/8" square pickets. Pressed steel ring. Can be mounted in a line between the top rails of 3-rail panels to give the look of ornamental circles (11 required per panel). Includes two (2) #10 x 1/2" self-drilling screws. Not available for 3" Air Gap spacing.							
Picket Plug 	AB502	3.32	----	3.32	5/8"	21/Bag	.06
5/8" plug for flat top pickets. SOLD IN BAG QUANTITY ONLY.							

N/S = Non Stock





MONTAGE ATF®

AMERISTAR FENCE.com
FASTENERS

1-888-333-3422
FAX: 1-877-926-3747

ITEM DESCRIPTION	PART NUMBER / COLOR			SIZE	UNIT OF MEASURE	WT EA.
	BLACK PART NO.	BRONZE PART NO.	DEALER PRICE			
Self-Drilling Screws 	HB524P-50	HN524P-50	6.50	#14 X 3/4"	50/Bag	.6
Stainless steel hex head self-drilling screws for brackets and adornments.						
Self-Drilling Screws 	HB539P-50	HN539P-50	5.00	#10 x 3/4"	50/Bag	.6
Stainless steel hex head self-drilling screws for brackets and adornments.						
Phillips Head Screws 	H519P	-----	.07	#10 x 5/8"	Ea.	.005
Stainless steel flat head screw for setting angle on Montage swivel bracket.						
Carriage Bolts 	HB511P-20	HN511P-20	2.76	1/4" x 1-1/2"	20/Bag	.5
Stainless steel carriage bolts for brackets.						
Flange Nuts 	HB541P-20	HN541P-20	3.40	1/4"	20/Bag	.2
1/4" Stainless steel flange nuts for brackets.						

CUSTOM FINISHES

ITEM DESCRIPTION	BLACK		COLOR		WEIGHT EACH
	BLACK PART NO.	DEALER PRICE	BRONZE PART NO.	DEALER PRICE	
Paint Pen 	PB100	11.63	PN100	12.21	.5
Custom finishes in the two standard Montage Fence colors.					
Zinc-Rich Paint Pen 	PZ100			11.63	.5
Priming required for cut steel edges prior to application of Ameristar Custom Finishes. NOTE: All cut rail ends must be seal coated with Zinc Rich Primer and Ameristar's custom touch-up paint or the warranty is void.					
Spray Paint 	FB100	8.18	FN100	9.23	1.1
Custom finishes in the two standard Montage Fence colors.					
Zinc-Rich Primer 	FZ100			9.23	1.1
Ideal for priming cut steel edges of Montage Fence components prior to applying the appropriate custom finish color. NOTE: All cut rail ends must be seal coated with Zinc Rich Primer and Ameristar's custom touch-up paint or the warranty is void.					

Montage® Residential - Steel Ornamental Fence System - Fusion Welded and Rackable
CONSTRUCTION SPECIFICATION - SECTION 32 31 00

PART 1 - GENERAL

1.01 WORK INCLUDED

The contractor shall provide all labor, materials and appurtenances necessary for installation of the welded ornamental steel fence system defined herein at (specify project site).

1.02 RELATED WORK

Section ___ - Earthwork

Section ___ - Concrete

1.03 SYSTEM DESCRIPTION

The manufacturer shall supply a total fence system of (specify Montage® standard picket space or Montage Pool, Pet & Play® 3" air space) Welded and Rackable (ATF - All Terrain Flexibility) Ornamental Steel (specify Classic™, Majestic™, Genesis™, Warrior™, Crescent™, or Gemini™) design. The system shall include all components (i.e., panels, posts, gates and hardware) required.

1.04 QUALITY ASSURANCE

The contractor shall provide laborers and supervisors who are thoroughly familiar with the type of construction involved and materials and techniques specified.

1.05 REFERENCES

ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot-Dip Process. ASTM B117 - Practice for Operating Salt-Spray (Fog) Apparatus. ASTM D523 - Test Method for Specular Gloss. ASTM D714 - Test Method for Evaluating Degree of Blistering in Paint. ASTM D822 - Practice for Conducting Tests on Paint and Related Coatings and Materials using Filtered Open-Flame Carbon-Arc Light and Water Exposure Apparatus. ASTM D1654 - Test Method for Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments. ASTM D2244 - Test Method for Calculation of Color Differences from Instrumentally Measured Color Coordinates. ASTM D2794 - Test Method for Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact). ASTM D3359 - Test Method for Measuring Adhesion by Tape Test. ASTM F2408 - Ornamental Fences Employing Galvanized Steel Tubular Pickets.

1.06 SUBMITTAL

The manufacturer's literature shall be submitted prior to installation.

1.07 PRODUCT HANDLING AND STORAGE

Upon receipt at the job site, all materials shall be checked to ensure that no damage occurred during shipping or handling. Materials shall be stored in such a manner to ensure proper ventilation and drainage, and to protect against damage, weather, vandalism and theft.

PART 2 - MATERIALS

2.01 MANUFACTURER

The fence system shall conform to (specify Montage® standard picket space or Montage Pool, Pet & Play® 3" air space) Welded and Rackable (ATF - All Terrain Flexibility) Ornamental Steel (specify Classic™, Majestic™, Genesis™, Warrior™, Crescent™, or Gemini™) design, (specify extended picket or flush) bottom rail treatment, (specify 2-Rail, 3-Rail or 4-Rail) style manufactured by Ameristar Fence Products, Inc., in Tulsa, Oklahoma.

2.02 MATERIAL

A. Steel material for fence panels and posts conform to the requirements of ASTM A653/A653M, with a minimum yield strength of 45,000 psi (310 MPa) and a minimum zinc (hot-dip galvanized) coating weight of 0.60 oz/ft² (184 g/m²), Coating Designation G-60. A minimum of 62% of the steel material shall be derived from recycled scrap metal.

B. Material for pickets shall be 5/8" square x 18 Ga. tubing. The rails shall be steel channel, 1.25" x 0.92" x 14 Ga. Picket holes in the rail shall be spaced (specify 4.334" o.c. for standard picket space or 3.500" o.c. for 3" air space). Fence posts shall be a minimum of 2" square x 16 Ga. Gate posts shall meet the minimum requirements of Table 1.

2.03 FABRICATION

A. Pickets, rails and posts shall be pre-cut to specified lengths. Rails shall be pre-punched to accept pickets.

B. Pickets shall be inserted into the pre-punched holes in the rails and shall be aligned to standard spacing using a specially calibrated alignment fixture. The aligned pickets and rails shall be joined at each picket-to-rail intersection by Ameristar's proprietary fusion welding process, thus completing the rigid panel assembly (Note: The process produces a virtually seamless, spatter-free good-neighbor appearance, equally attractive from either side of the panel).

C. The manufactured panels and posts shall be subjected to an inline electrode position coating (E-Coat) process consisting of a multi-stage pretreatment/wash (with zinc phosphate), followed by a duplex application of an epoxy primer and an acrylic topcoat. The minimum cumulative coating thickness of epoxy and acrylic shall be 2 mils (0.058 mm). The color shall be (specify Black or Bronze). The coated panels and posts shall be capable of meeting the performance requirements for each quality characteristic shown in Table 2 (Note: The requirements in Table 2 meet or exceed the coating performance criteria of ASTM F2408).

D. The manufactured fence system shall be capable of meeting the vertical load, horizontal load, and in-fill performance requirements for Industrial weight fences under ASTM F2408.

E. Gates shall be fabricated using welded ornamental panel material and gate ends having a 1-1/4" square cross-sectional size. All rail and upright intersections shall be joined by welding. All picket and rail intersections shall also be joined by welding.

PART 3 - EXECUTION

3.01 PREPARATION

All new installation shall be laid out by the contractor in accordance with the construction plans.

3.02 FENCE INSTALLATION

Fence post shall be spaced according to Table 3, plus or minus 1/2". For installations that must be racked to follow sloping grades, the post spacing dimension must be measured along the grade. Fence panels shall be attached to posts with brackets supplied by the manufacturer. The "Earthwork" and "Concrete" sections of this specification shall govern material requirements for the concrete footer.

3.03 FENCE INSTALLATION MAINTENANCE

When cutting/drilling rails or posts adhere to the following steps to seal the exposed steel surfaces; 1) Remove all metal shavings from cut area. 2) Apply zinc-rich primer to thoroughly cover cut edge and/or drilled hole; let dry. 3) Apply 2 coats of custom finish paint matching fence color. Failure to seal exposed surfaces per steps 1-3 above will negate warranty. Ameristar spray cans or paint pens shall be used to prime and finish exposed surfaces; it is recommended that paint pens be used to prevent overspray. Use of non-Ameristar parts or components will negate the manufacturer's warranty.

3.04 GATE INSTALLATION

Gate posts shall be spaced according to the manufacturers' gate drawings, dependent on standard out-to-out gate leaf dimensions and gate hardware selected. Type and quantity of gate hinges shall be based on the application; weight, height, and number of gate cycles. The manufacturers' gate drawings shall identify the necessary gate hardware required for the application. Gate hardware shall be provided by the manufacturer of the gate and shall be installed per manufacturer's recommendations.

3.05 CLEANING

The contractor shall clean the jobsite of excess materials; post-hole excavations shall be scattered uniformly away from posts.

Table 1 - Minimum Sizes for Montage Gate Post

Gate Opening	Gate Height	
	Up to & Including 4'	Over 4' Up to & Including 6'
Up To & Including 4'	2" x 16 Ga.	2" x 16 Ga.
Over 4', Up To & Including 6'	2" x 16 Ga.	2-1/2" x 16 Ga.

Table 2 - Coating Performance Requirements

Quality Characteristics	ASTM Test Method	Performance Requirements
Adhesion	D3359 - Method B	Adhesion (Retention of Coating) over 90% of test area (Tape and knife test).
Corrosion Resistance	B117, D714 & D1654	Corrosion Resistance over 1,000 hours (Scribed per D1654; failure mode is accumulation of 1/8" coating loss from scribe or medium #8 blisters).
Impact Resistance	D2794	Impact Resistance over 60 inch lb. (Forward impact using 0.625" ball).
Weathering Resistance	D822, D2244, D523 (60° Method)	Weathering Resistance over 1,000 hours (Failure mode is 60% loss of gloss or color variance of more than 3 delta-E color units).

Table 3 - Montage - Post Spacing By Bracket Type

Span	For CLASSIC, GENESIS, MAJESTIC, WARRIOR, CRESCENT & GEMINI 8' Nominal (94" Rail)			
	2"	2"	2"	2"
Post Size	2"	2"	2"	2"
Bracket Type	Montage Universal (BB102)	Montage Line Boulevard (BB104)	Montage Flat Mount (BB105)	Montage Swivel (BB106)
Post Settings +/- 1/2" O.C.	96-3/4"	96-3/4"	96-3/4"	96-3/4"

Note: When using BB106 swivel brackets on either or both ends of a panel installation, care must be taken to ensure the spacing between post and adjoining pickets meets applicable codes. This will require trimming one or both ends of the panel.



1555 N. MINGO RD. • TULSA, OKLAHOMA 74116
www.ameristarfence.com

MONTAGE ATF® / MONTAGE PLUS ATF® WELDED ORNAMENTAL FENCE WARRANTY

AMERISTAR® Montage ATF® and Montage Plus ATF® Welded Ornamental Fences are manufactured from the highest quality materials by skilled craftsmen to meet the highest standards of workmanship in the industry. Galvanized steel framework is subjected to a multi-stage pretreatment/wash (with zinc phosphate), followed by a duplex cathodic electrocoat system consisting of an epoxy primer, which significantly increases corrosion protection, and an acrylic liquid topcoat, which provides the protection necessary to withstand adverse weathering effects.

The electrocoated surface on all Montage ATF® and Montage Plus ATF® Welded Ornamental panels, posts, and gates is guaranteed under normal and intended usage, against cracking, peeling, chipping, blistering or corroding commencing with the original purchase date and extending according to the applications defined in the table below. Normal and intended usage does not include physical damage, abrasion, or heavy salt spray exposure to the protective coating.

The following acts and/or omissions will void the subject warranty:

- Damage to the product caused by the property owner by use of landscape, gardening equipment, chemicals that may cause damage, and/or water sprinklers with high mineral content;
- Damage caused by adhesion of chicken wire or other similar substance to the product;
- Damage caused by allowing plant life of any sort to grow directly upon or in contact with any portion of the product or sap from trees;
- Any alteration to the product itself by the property owner including any on-site cutting or welding; and/or,
- Failure to follow any and all maintenance instructions provided by AMERISTAR at the time of sale to the original purchaser even if these instructions are not forwarded to the ultimate claimant under this warranty.
- When cutting Montage ATF® rails immediately seal the exposed surfaces by 1) Removing all metal shavings from cut area 2) Apply zinc-rich primer to thoroughly cover cut edge and drilled hole; let dry 3) Apply 2 coats of custom finish spray paint matching fence color. Failure to seal exposed surfaces per steps 1-3 above will negate warranty.
- If contractor uses non Ameristar parts/components this will negate the warranty.

AMERISTAR® Montage ATF® and Montage Plus ATF® Welded Ornamental Fences are also guaranteed for the same period of time against defects in workmanship or materials. Should any Montage ATF® or Montage Plus ATF® Welded Ornamental panel or post manufactured by Ameristar Fence Product fail in accordance with any of the above conditions, Ameristar Fence Products warrants to the original purchaser their redemption through replacement, renewal or issuance of a pro-rated credit. The choice of redemption method is solely at the discretion of Ameristar. If the pro-rated alternative is chosen, the amount will be based on the original cost of materials at the date of purchase multiplied by the appropriate time and exposure factor from the table below:

<u>Application</u>	<u>Length of Warranty</u>
Fence Installations 0 to 1 Mile from Salt Water Coast Line	5 Years
Fence Installations 1 to 20 Miles from Salt Water Coast Line	10 Years
Fence Installations Over 20 Miles from Salt Water Coast Line	20 Years

Note: Regardless of Location and Years in Service, evidence of historical salt spray exposure shall be considered as grounds to void any warranty obligations.

Notice of failure under the conditions of this warranty shall be sent to Ameristar Fence Products or its authorized representative, in writing, together with proof of purchase and shall specify the nature of the defect and when it was first observed as well as photographs of current site conditions. Should the fence be improperly installed, Ameristar Fence Products shall not be responsible for guaranteed performance or appearance of the material. Neither does this guarantee apply when failure or damage is due to improper use or application, abuse or misuse, salt spray exposure (see Table and Note), vandalism, or acts of God. Ameristar Fence Products reserves the right to inspect the material to determine validity of the claim.

Upon acceptance of the claim by Ameristar Fence Products or its authorized representative, redemption by replacement, renewal or issuance of a pro-rated credit shall be made by Ameristar Fence Products. Reimbursement for the cost of removal of existing material and the freight and installation of replacement material is not included in the guarantee, nor will Ameristar Fence Products provide those services.

The above constitutes the complete warranty by the manufacturer. No other agreement, written or implied, is valid. Ameristar Fence Products does not authorize any other person or agent to make any other express warranties. Ameristar Fence Products neither assumes nor authorizes any other person or agent to assume any other liability in connection with the Montage ATF® and Montage Plus ATF® Welded Ornamental Fence System.

PURCHASE DATE _____

DEALER SIGNATURE _____



1555 N. MINGO RD. • TULSA, OKLAHOMA 74116

MONTAGE ATF® WELDED GATES



1-888-333-3422
FAX: 1-877-926-3747

GATE SPECIFICATIONS

STANDARD


Gate Ends: 1-1/4" Sq. (16 Ga.) Steel
Rails: 15/16" W x 1-1/4" H (14 Ga.)
Pickets: 5/8" Sq. (18 Ga.)

ARCHED (3.5'- 6' Openings)


Gate Ends: 1-1/4" Sq. (16 Ga.) Steel
Rails: 15/16" W x 1-1/4" H (14 Ga.)
Pickets: 5/8" Sq. (18 Ga.)

All component intersections are welded for greater strength


GATE DRAWING DIMENSIONAL FORMAT



Order 1 Leaf For Single Swing Opening

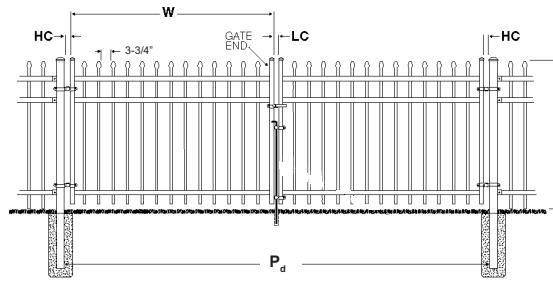

Order 2 Leaves For Double Swing Opening



Order 1 Leaf For Single Swing Opening
(Available only as single)

W = Outside To Outside Width of Finished Gate Leaf
H = Height; HC = Hinge Clearance; LC = Latch Clearance;
P_s = Gate Post Spacing (Inside-To-Inside) for Single Gate; P_d = Gate Post Spacing (Inside-To-Inside) for Double Gate

See Montage Specification for Montage ATF Gate Post Recommendation

HARDWARE KITS & POST INTERSPACES FOR MONTAGE ATF SINGLE SWING WELDED STEEL GATES							
NOMINAL GATE OPENING	3-1/2'	4'	5'	6'	7'	8'	
W = LEAF WIDTH	36-1/2"	45"	62-1/2"	71"	79-3/4"	96-1/2"	
D&D SINGLE GATE HARDWARE KIT #DSKM	HC	1-1/8"					
	LC	3/4"					
	P _s	38-3/8"	46-7/8"	64-3/8"	72-7/8"	81-5/8"	98-3/8"
D&D SINGLE POOL GATE HARDWARE KIT #DSKP	HC	1-1/8"					
	LC	3/4"					
	P _s	38-3/8"	46-7/8"	64-3/8"	72-7/8"	81-5/8"	98-3/8"
P _s (Gate Post Spacing (Inside-To-Inside) for Single Gate = HC (Hinge Clearance) + W (Out-To-Out Gate Width) + LC (Latch Clearance))							

HARDWARE KITS & POST INTERSPACES FOR MONTAGE ATF DOUBLE SWING WELDED STEEL GATES							
NOMINAL GATE OPENING	7'	8'	10'	12'	14'	16'	
W = LEAF WIDTH	36-1/2"	45"	62-1/2"	71"	79-3/4"	96-1/2"	
D&D DOUBLE GATE HARDWARE KIT #DDKM	HC	3/4"					
	LC	3/4"					
	P _s	75-1/4"	92-1/4"	127-1/4"	144-1/4"	161-3/4"	195-1/4"
P _d (Gate Post Spacing (Inside-To-Inside) for Double Gate = 2 x HC (Hinge Clearance) + 2 x W (Out-To-Out Gate Width) + LC (Latch Clearance))							

**MONTAGE ATF®
SINGLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747



2-Rail (Single)
(4" Air Gap)



* NOT AVAILABLE
FOR 3-1/2' & 5' OPENINGS

All Single Swing Gates include hardware with the exception of 7' and 8'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE			STOCKING STYLE/COLOR
					SUPPLIED		HDW KIT PART #	
					NO	YES		
3' H	*3-1/2'	36-1/2"	W * X 234-42M	19		●	DSKM	N/A
	4'	45"	W * X 234-48M	22		●	DSKM	N/A
	*5'	62-1/2"	W * X 234-60M	27		●	DSKM	N/A
	6'	71"	W * X 234-72M	30		●	DSKM	N/A
	7'	79-3/4"	W * X 234-84	31	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	W * X 234-96	36	●	See Hardware Section for Recommendation		N/A
3-1/2' H	*3-1/2'	36-1/2"	W * X 240-42M	21		●	DSKM	N/A
	4'	45"	W * X 240-48M	24		●	DSKM	N/A
	*5'	62-1/2"	W * X 240-60M	31		●	DSKM	N/A
	6'	71"	W * X 240-72M	34		●	DSKM	N/A
	7'	79-3/4"	W * X 240-84	35	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	W * X 240-96	41	●	See Hardware Section for Recommendation		N/A
4' H	*3-1/2'	36-1/2"	W * X 246-42M	26		●	DSKM	N/A
	4'	45"	W * X 246-48M	27		●	DSKM	CLS, MAJ, GEN/BLK
	*5'	62-1/2"	W * X 246-60M	34		●	DSKM	CLS, MAJ, GEN/BLK
	6'	71"	W * X 246-72M	37		●	DSKM	CLS, MAJ/BLK
	7'	79-3/4"	W * X 246-84	39	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	W * X 246-96	46	●	See Hardware Section for Recommendation		N/A
5' H	*3-1/2'	36-1/2"	W * X 258-42M	31		●	DSKM	N/A
	4'	45"	W * X 258-48M	32		●	DSKM	CLS, MAJ, GEN/BLK
	*5'	62-1/2"	W * X 258-60M	38		●	DSKM	CLS, MAJ/BLK
	6'	71"	W * X 258-72M	44		●	DSKM	N/A
	7'	79-3/4"	W * X 258-84	46	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	W * X 258-96	55	●	See Hardware Section for Recommendation		N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)

CLASSIC = **C** B = BLACK
MAJESTIC = **M** N = BRONZE
GENESIS = **G**
WARRIOR = **W**
CRESCENT = **L** (3-1/2' & 5' OPENINGS NOT AVAILABLE)
GEMINI = N/A IN 4" AIR GAP


NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15
7'	17 (18 IN CRESCENT)
8'	21

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

**MONTAGE ATF®
DOUBLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747

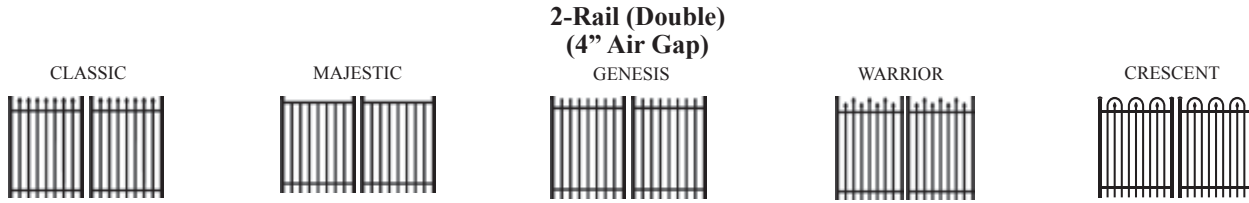

All Double Swing Gates include two (2) Gate Leafs .
All Double Swing Gates include hardware with the exception of 14' and 16'.

* NOT AVAILABLE FOR 7' & 10' OPENINGS

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	HW KIT YES PART #	
3' H	*7'	36-1/2"	W <u>•</u> <u>X</u> 234-84MD	40			N/A
	8'	45"	W <u>•</u> <u>X</u> 234-96MD	46	•	DDKM	N/A
	*10'	62-1/2"	W <u>•</u> <u>X</u> 234-120MD	56	•	DDKM	N/A
	12'	71"	W <u>•</u> <u>X</u> 234-144MD	62	•	DDKM	N/A
	14'	79-3/4"	W <u>•</u> <u>X</u> 234-168D	68	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u>•</u> <u>X</u> 234-192D	72	•		N/A
3-1/2' H	*7'	36-1/2"	W <u>•</u> <u>X</u> 240-84MD	44			N/A
	8'	45"	W <u>•</u> <u>X</u> 240-96MD	50	•	DDKM	N/A
	*10'	62-1/2"	W <u>•</u> <u>X</u> 240-120MD	64	•	DDKM	N/A
	12'	71"	W <u>•</u> <u>X</u> 240-144MD	70	•	DDKM	N/A
	14'	79-3/4"	W <u>•</u> <u>X</u> 240-168D	76	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u>•</u> <u>X</u> 240-192D	82	•		N/A
4' H	*7'	36-1/2"	W <u>•</u> <u>X</u> 246-84MD	52			N/A
	8'	45"	W <u>•</u> <u>X</u> 246-96MD	56	•	DDKM	CLS, MAJ, GEN/BLK
	*10'	62-1/2"	W <u>•</u> <u>X</u> 246-120MD	66	•	DDKM	CLS, MAJ, GEN/BLK
	12'	71"	W <u>•</u> <u>X</u> 246-144MD	76	•	DDKM	CLS, MAJ/BLK
	14'	79-3/4"	W <u>•</u> <u>X</u> 246-168D	84	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u>•</u> <u>X</u> 246-192D	92	•		N/A
5' H	*7'	36-1/2"	W <u>•</u> <u>X</u> 258-84MD	62			N/A
	8'	45"	W <u>•</u> <u>X</u> 258-96MD	66	•	DDKM	CLS, MAJ, GEN/BLK
	*10'	62-1/2"	W <u>•</u> <u>X</u> 258-120MD	78	•	DDKM	CLS, MAJ/BLK
	12'	71"	W <u>•</u> <u>X</u> 258-144MD	90	•	DDKM	N/A
	14'	79-3/4"	W <u>•</u> <u>X</u> 258-168D	98	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u>•</u> <u>X</u> 258-192D	110	•		N/A

STYLE SELECTION = * X = COLOR SELECTION

Double Swing Gate Hardware Kit Includes (DDKM):
 4 – KwikFit Pivoting Hinge (KFP)
 1 – LokkLatch Key-Lockable Gate Latch (LLAAB)
 1 – Q-Bolt Cane Bolt (QB124)

CLASSIC = C B = BLACK
 MAJESTIC = M N = BRONZE
 GENESIS = G
 WARRIOR = W
 CRESCENT = L (7' & 10' OPENINGS NOT AVAILABLE)
 GEMINI = N/A IN 4" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
7'	7
8'	9
10'	13
12'	15
14'	17 (18 IN CRESCENT)
16'	21

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
 Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

**MONTAGE ATF®
SINGLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747

**2-Rail (Single)
(3" Air Gap)**



All Single Swing Gates include hardware with the exception of 7' and 8'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	YES HDW KIT PART #	
3' H	3-1/2'	36-1/2"	R * <u>X</u> 234-42M	19		●	DSKM N/A
	4'	45"	R * <u>X</u> 234-48M	23		●	DSKM N/A
	5'	62-1/2"	R * <u>X</u> 234-60M	29		●	DSKM N/A
	6'	71"	R * <u>X</u> 234-72M	34		●	DSKM N/A
	7'	79-3/4"	R * <u>X</u> 234-84	39	●	See Hardware Section for Recommendation N/A	
	8'	96-1/2"	R * <u>X</u> 234-96	42	●	See Hardware Section for Recommendation N/A	
3-1/2' H	3-1/2'	36-1/2"	R * <u>X</u> 240-42M	23		●	DSKM N/A
	4'	45"	R * <u>X</u> 240-48M	26		●	DSKM N/A
	5'	62-1/2"	R * <u>X</u> 240-60M	33		●	DSKM N/A
	6'	71"	R * <u>X</u> 240-72M	38		●	DSKM N/A
	7'	79-3/4"	R * <u>X</u> 240-84	41	●	See Hardware Section for Recommendation N/A	
	8'	96-1/2"	R * <u>X</u> 240-96	45	●	See Hardware Section for Recommendation N/A	
4' H	3-1/2'	36-1/2"	R * <u>X</u> 246-42M	27		●	DSKM N/A
	4'	45"	R * <u>X</u> 246-48M	30		●	DSKM N/A
	5'	62-1/2"	R * <u>X</u> 246-60M	36		●	DSKM N/A
	6'	71"	R * <u>X</u> 246-72M	42		●	DSKM N/A
	7'	79-3/4"	R * <u>X</u> 246-84	44	●	See Hardware Section for Recommendation N/A	
	8'	96-1/2"	R * <u>X</u> 246-96	52	●	See Hardware Section for Recommendation N/A	

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)

- MAJESTIC = M B = BLACK
 GEMINI = H N = BRONZE
 CLASSIC = N/A IN 3" AIR GAP
 GENESIS = N/A IN 3" AIR GAP
 WARRIOR = N/A IN 3" AIR GAP
 CRESCENT = N/A IN 3" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	9 (10 IN GEMINI)
4'	11 (12 IN GEMINI)
5'	16
6'	19 (18 IN GEMINI)
7'	21 (22 IN GEMINI)
8'	26

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
 Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

**MONTAGE ATF®
DOUBLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747

**2-Rail (Double)
(3" Air Gap)**



**All Double Swing Gates include two (2) Gate Leafs .
All Double Swing Gates include hardware with the exception of 14' and 16'.**

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR	
					SUPPLIED NO YES	HDW KIT PART #		
3' H	7'	36-1/2"	R * <u>X</u> 234-84MD	44		•	DDKM	N/A
	8'	45"	R * <u>X</u> 234-96MD	48		•	DDKM	N/A
	10'	62-1/2"	R * <u>X</u> 234-120MD	60		•	DDKM	N/A
	12'	71"	R * <u>X</u> 234-144MD	70		•	DDKM	N/A
	14'	79-3/4"	R * <u>X</u> 234-168D	68	•	See Hardware Section for Recommendation		N/A
	16'	96-1/2"	R * <u>X</u> 234-192D	80	•	See Hardware Section for Recommendation		N/A
3-1/2' H	7'	36-1/2"	R * <u>X</u> 240-84MD	48		•	DDKM	N/A
	8'	45"	R * <u>X</u> 240-96MD	54		•	DDKM	N/A
	10'	62-1/2"	R * <u>X</u> 240-120MD	68		•	DDKM	N/A
	12'	71"	R * <u>X</u> 240-144MD	78		•	DDKM	N/A
	14'	79-3/4"	R * <u>X</u> 240-168D	78	•	See Hardware Section for Recommendation		N/A
	16'	96-1/2"	R * <u>X</u> 240-192D	90	•	See Hardware Section for Recommendation		N/A
4' H	7'	36-1/2"	R * <u>X</u> 246-84MD	56		•	DDKM	N/A
	8'	45"	R * <u>X</u> 246-96MD	62		•	DDKM	N/A
	10'	62-1/2"	R * <u>X</u> 246-120MD	74		•	DDKM	N/A
	12'	71"	R * <u>X</u> 246-144MD	86		•	DDKM	N/A
	14'	79-3/4"	R * <u>X</u> 246-168D	88	•	See Hardware Section for Recommendation		N/A
	16'	96-1/2"	R * <u>X</u> 246-192D	104	•	See Hardware Section for Recommendation		N/A

STYLE SELECTION = * X = COLOR SELECTION

Double Swing Gate Hardware Kit Includes (DDKM):
4 – KwikFit Pivoting Hinge (KFP)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)
1 – Q-Bolt Cane Bolt (QB124)

MAJESTIC = M B = BLACK
GEMINI = H N = BRONZE
CLASSIC = N/A IN 3" AIR GAP
GENESIS = N/A IN 3" AIR GAP
WARRIOR = N/A IN 3" AIR GAP
CRESCENT = N/A IN 3" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	9 (10 IN GEMINI)
4'	11 (12 IN GEMINI)
5'	16
6'	19 (18 IN GEMINI)
7'	21 (22 IN GEMINI)
8'	26


For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

MONTAGE ATF®
SINGLE SWING GATES



1-888-333-3422
FAX: 1-877-926-3747

2-Rail (Single Flush Bottom)
(4" Air Gap)



* NOT AVAILABLE
FOR 3-1/2' & 5' OPENINGS

All Single Swing Gates include hardware with the exception of 7' and 8'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	HDW KIT PART #	
3' H	*3-1/2'	36-1/2"	W * <u>X</u> 234F-42M	19		●	DSKM N/A
	4'	45"	W * <u>X</u> 234F-48M	22		●	DSKM N/A
	*5'	62-1/2"	W * <u>X</u> 234F-60M	27		●	DSKM N/A
	6'	71"	W * <u>X</u> 234F-72M	30		●	DSKM N/A
	7'	79-3/4"	W * <u>X</u> 234F-84	31	●		See Hardware Section for Recommendation N/A
	8'	96-1/2"	W * <u>X</u> 234F-96	36	●		See Hardware Section for Recommendation N/A
3-1/2' H	*3-1/2'	36-1/2"	W * <u>X</u> 240F-42M	22		●	DSKM N/A
	4'	45"	W * <u>X</u> 240F-48M	24		●	DSKM N/A
	*5'	62-1/2"	W * <u>X</u> 240F-60M	31		●	DSKM N/A
	6'	71"	W * <u>X</u> 240F-72M	34		●	DSKM N/A
	7'	79-3/4"	W * <u>X</u> 240F-84	35	●		See Hardware Section for Recommendation N/A
	8'	96-1/2"	W * <u>X</u> 240F-96	41	●		See Hardware Section for Recommendation N/A
4' H	*3-1/2'	36-1/2"	W * <u>X</u> 246F-42M	25		●	DSKM N/A
	4'	45"	W * <u>X</u> 246F-48M	27		●	DSKM MAJ/BLK
	*5'	62-1/2"	W * <u>X</u> 246F-60M	34		●	DSKM MAJ/BLK
	6'	71"	W * <u>X</u> 246F-72M	37		●	DSKM N/A
	7'	79-3/4"	W * <u>X</u> 246F-84	39	●		See Hardware Section for Recommendation N/A
	8'	96-1/2"	W * <u>X</u> 246F-96	46	●		See Hardware Section for Recommendation N/A
4' H (MAJESTIC POOL ONLY)	*3-1/2'	36-1/2"	W M <u>X</u> 246F-42P	25		●	DSKP N/A
	4'	45"	W M <u>X</u> 246F-48P	27		●	DSKP MAJ/BLK
	*5'	62-1/2"	W M <u>X</u> 246F-60P	34		●	DSKP MAJ/BLK
	6'	71"	W M <u>X</u> 246F-72P	37		●	DSKP N/A
	7'	79-3/4"	W M <u>X</u> 246F-84	39	●		See Hardware Section for Recommendation N/A
	8'	96-1/2"	W M <u>X</u> 246F-96	46	●		See Hardware Section for Recommendation N/A
5' H	*3-1/2'	36-1/2"	W * <u>X</u> 258F-42M	31		●	DSKM N/A
	4'	45"	W * <u>X</u> 258F-48M	32		●	DSKM MAJ/BLK
	*5'	62-1/2"	W * <u>X</u> 258F-60M	38		●	DSKM N/A
	6'	71"	W * <u>X</u> 258F-72M	44		●	DSKM N/A
	7'	79-3/4"	W * <u>X</u> 258F-84	46	●		See Hardware Section for Recommendation N/A
	8'	96-1/2"	W * <u>X</u> 258F-96	55	●		See Hardware Section for Recommendation N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - LokkLatch Key-Lockable Gate Latch (LLAAB)

Single Swing Gate Hardware Kit Includes (DSKP):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - MagnaLatch Top Pull Gate Latch (MLTPS2BGA)

CLASSIC = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G
WARRIOR = W
CRESCENT = L (3-1/2' & 5' OPENINGS NOT AVAILABLE)
GEMINI = N/A IN 4" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15
7'	17 (CRESCENT)
8'	21


For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

**MONTAGE ATF®
DOUBLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747

**2-Rail (Double Flush Bottom)
(4" Air Gap)**



**All Double Swing Gates include two (2) Gate Leafs .
All Double Swing Gates include hardware with the exception of 14' and 16'.**

* NOT AVAILABLE
FOR 7' & 10' OPENINGS

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE SUPPLIED		HDW KIT PART #	STOCKING STYLE/COLOR
					NO	YES		
3' H	*7'	36-1/2"	W <u>*</u> <u>X</u> 234F-84MD	40		•	DDKM	N/A
	8'	45"	W <u>*</u> <u>X</u> 234F-96MD	46		•	DDKM	N/A
	10'	62-1/2"	W <u></u> <u>X</u> 234F-120MD	56		•	DDKM	N/A
	12'	71"	W <u>*</u> <u>X</u> 234F-144MD	62		•	DDKM	N/A
	14'	79-3/4"	W <u>*</u> <u>X</u> 234F-168D	68	•	See Hardware Section for Recommendation		N/A
	16'	96-1/2"	W <u>*</u> <u>X</u> 234F-192D	72	•	See Hardware Section for Recommendation		N/A
3-1/2' H	*7'	36-1/2"	W <u>*</u> <u>X</u> 240F-84MD	44		•	DDKM	N/A
	8'	45"	W <u>*</u> <u>X</u> 240F-96MD	50		•	DDKM	N/A
	10'	62-1/2"	W <u></u> <u>X</u> 240F-120MD	64		•	DDKM	N/A
	12'	71"	W <u>*</u> <u>X</u> 240F-144MD	70		•	DDKM	N/A
	14'	79-3/4"	W <u>*</u> <u>X</u> 240F-168D	76	•	See Hardware Section for Recommendation		N/A
	16'	96-1/2"	W <u>*</u> <u>X</u> 240F-192D	82	•	See Hardware Section for Recommendation		N/A
4' H	*7'	36-1/2"	W <u>*</u> <u>X</u> 246F-84MD	52		•	DDKM	N/A
	8'	45"	W <u>*</u> <u>X</u> 246F-96MD	56		•	DDKM	MAJ/BLK
	10'	62-1/2"	W <u></u> <u>X</u> 246F-120MD	66		•	DDKM	MAJ/BLK
	12'	71"	W <u>*</u> <u>X</u> 246F-144MD	76		•	DDKM	N/A
	14'	79-3/4"	W <u>*</u> <u>X</u> 246F-168D	84	•	See Hardware Section for Recommendation		N/A
	16'	96-1/2"	W <u>*</u> <u>X</u> 246F-192D	92	•	See Hardware Section for Recommendation		N/A
5' H	*7'	36-1/2"	W <u>*</u> <u>X</u> 258F-84MD	62		•	DDKM	N/A
	8'	45"	W <u>*</u> <u>X</u> 258F-96MD	66		•	DDKM	MAJ/BLK
	10'	62-1/2"	W <u></u> <u>X</u> 258F-120MD	78		•	DDKM	N/A
	12'	71"	W <u>*</u> <u>X</u> 258F-144MD	90		•	DDKM	N/A
	14'	79-3/4"	W <u>*</u> <u>X</u> 258F-168D	98	•	See Hardware Section for Recommendation		N/A
	16'	96-1/2"	W <u>*</u> <u>X</u> 258F-192D	110	•	See Hardware Section for Recommendation		N/A

STYLE SELECTION = * X = COLOR SELECTION

Double Swing Gate Hardware Kit Includes (DDKM):
4 – KwikFit Pivoting Hinge (KFP)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)
1 – Q-Bolt Cane Bolt (QB124)

CLASSIC = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G
WARRIOR = W
CRESCENT = L (7' & 10' OPENINGS NOT AVAILABLE)
GEMINI = N/A IN 4" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15
7'	17 (CRESCENT)
8'	21

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

**MONTAGE ATF®
SINGLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747

**2-Rail (Single Flush Bottom)
(3" Air Gap)**



All Single Swing Gates include hardware with the exception of 7' and 8'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR	
					SUPPLIED NO	HDW KIT PART #		
3' H	3-1/2'	36-1/2"	R * <u>X</u> 234F-42M	19		●	DSKM	N/A
	4'	45"	R * <u>X</u> 234F-48M	23		●	DSKM	N/A
	5'	62-1/2"	R * <u>X</u> 234F-60M	29		●	DSKM	N/A
	6'	71"	R * <u>X</u> 234F-72M	34		●	DSKM	N/A
	7'	79-3/4"	R * <u>X</u> 234F-84	39	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	R * <u>X</u> 234F-96	42	●	See Hardware Section for Recommendation		N/A
3-1/2' H	3-1/2'	36-1/2"	R * <u>X</u> 240F-42M	23		●	DSKM	N/A
	4'	45"	R * <u>X</u> 240F-48M	26		●	DSKM	N/A
	5'	62-1/2"	R * <u>X</u> 240F-60M	33		●	DSKM	N/A
	6'	71"	R * <u>X</u> 240F-72M	38		●	DSKM	N/A
	7'	79-3/4"	R * <u>X</u> 240F-84	41	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	R * <u>X</u> 240F-96	45	●	See Hardware Section for Recommendation		N/A
4' H	3-1/2'	36-1/2"	R * <u>X</u> 246F-42M	28		●	DSKM	N/A
	4'	45"	R * <u>X</u> 246F-48M	31		●	DSKM	N/A
	5'	62-1/2"	R * <u>X</u> 246F-60M	37		●	DSKM	N/A
	6'	71"	R * <u>X</u> 246F-72M	43		●	DSKM	N/A
	7'	79-3/4"	R * <u>X</u> 246F-84	44	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	R * <u>X</u> 246F-96	52	●	See Hardware Section for Recommendation		N/A
4' H (MAJESTIC POOL ONLY)	3-1/2'	36-1/2"	R M <u>X</u> 246F-42P	28		●	DSKP	N/A
	4'	45"	R M <u>X</u> 246F-48P	31		●	DSKP	N/A
	5'	62-1/2"	R M <u>X</u> 246F-60P	37		●	DSKP	N/A
	6'	71"	R M <u>X</u> 246F-72P	43		●	DSKP	N/A
	7'	79-3/4"	R M <u>X</u> 246F-84	44	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	R M <u>X</u> 246F-96	52	●	See Hardware Section for Recommendation		N/A
5' H	3-1/2'	36-1/2"	R * <u>X</u> 258F-42M	33		●	DSKM	N/A
	4'	45"	R * <u>X</u> 258F-48M	36		●	DSKM	N/A
	5'	62-1/2"	R * <u>X</u> 258F-60M	43		●	DSKM	N/A
	6'	71"	R * <u>X</u> 258F-72M	51		●	DSKM	N/A
	7'	79-3/4"	R * <u>X</u> 258F-84	55	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	R * <u>X</u> 258F-96	65	●	See Hardware Section for Recommendation		N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)

Single Swing Gate Hardware Kit Includes (DSKP):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – MagnaLatch Top Pull Gate Latch (MLTPS2BGA)

MAJESTIC = **M** **B** = BLACK
GEMINI = **H** **N** = BRONZE
CLASSIC = N/A IN 3" AIR GAP
GENESIS = N/A IN 3" AIR GAP
WARRIOR = N/A IN 3" AIR GAP
CRESCENT = N/A IN 3" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	9 (10 IN GEMINI)
4'	11 (12 IN GEMINI)
5'	16
6'	19 (18 IN GEMINI)
7'	21 (22 IN GEMINI)
8'	26

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.


**MONTAGE ATF®
DOUBLE SWING GATES**




1-888-333-3422
FAX: 1-877-926-3747

**2-Rail (Double Flush Bottom)
(3" Air Gap)**

MAJESTIC



GEMINI



**All Double Swing Gates include two (2) Gate Leafs .
All Double Swing Gates include hardware with the exception of 14' and 16'.**

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	HDW KIT PART #	
3' H	7'	36-1/2"	R * <u>X</u> 234F-84MD	44		● DDKM	N/A
	8'	45"	R * <u>X</u> 234F-96MD	48		● DDKM	N/A
	10'	62-1/2"	R * <u>X</u> 234F-120MD	60		● DDKM	N/A
	12'	71"	R * <u>X</u> 234F-144MD	70		● DDKM	N/A
	14'	79-3/4"	R * <u>X</u> 234F-168D	68	●	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R * <u>X</u> 234F-192D	80	●		N/A
3-1/2' H	7'	36-1/2"	R * <u>X</u> 240F-84MD	48		● DDKM	N/A
	8'	45"	R * <u>X</u> 240F-96MD	54		● DDKM	N/A
	10'	62-1/2"	R * <u>X</u> 240F-120MD	68		● DDKM	N/A
	12'	71"	R * <u>X</u> 240F-144MD	78		● DDKM	N/A
	14'	79-3/4"	R * <u>X</u> 240F-168D	78	●	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R * <u>X</u> 240F-192D	90	●		N/A
4' H	7'	36-1/2"	R * <u>X</u> 246F-84MD	56		● DDKM	N/A
	8'	45"	R * <u>X</u> 246F-96MD	62		● DDKM	N/A
	10'	62-1/2"	R * <u>X</u> 246F-120MD	74		● DDKM	N/A
	12'	71"	R * <u>X</u> 246F-144MD	86		● DDKM	N/A
	14'	79-3/4"	R * <u>X</u> 246F-168D	88	●	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R * <u>X</u> 246F-192D	104	●		N/A
5' H	7'	36-1/2"	R * <u>X</u> 258F-84MD	68		● DDKM	N/A
	8'	45"	R * <u>X</u> 258F-96MD	74		● DDKM	N/A
	10'	62-1/2"	R * <u>X</u> 258F-144MD	88		● DDKM	N/A
	12'	71"	R * <u>X</u> 258F-72MD	104		● DDKM	N/A
	14'	79-3/4"	R * <u>X</u> 258F-168D	106	●	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R * <u>X</u> 258F-192D	126	●		N/A

STYLE SELECTION = * X = COLOR SELECTION

Double Swing Gate Hardware Kit Includes (DDKM):
4 – KwikFit Pivoting Hinge (KFP)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)
1 – Q-Bolt Cane Bolt (QB124)

MAJESTIC = M B = BLACK
GEMINI = H N = BRONZE
CLASSIC = N/A IN 3" AIR GAP
GENESIS = N/A IN 3" AIR GAP
WARRIOR = N/A IN 3" AIR GAP
CRESCENT = N/A IN 3" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	9 (10 IN GEMINI)
4'	11 (12 IN GEMINI)
5'	16
6'	19 (18 IN GEMINI)
7'	21 (22 IN GEMINI)
8'	26


For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

**MONTAGE ATF®
SINGLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747

CLASSIC



MAJESTIC



3-Rail (Single)
(4" Air Gap)

GENESIS



WARRIOR



* NOT AVAILABLE
FOR 3-1/2' & 5' OPENINGS
CRESCENT



All Single Swing Gates include hardware with the exception of 7' and 8'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	YES	
3' H	*3-1/2'	36-1/2"	W <u> </u> X 334-42M	21	●	DSKM	N/A
	4'	45"	W <u> </u> X 334-48M	24	●	DSKM	N/A
	*5'	62-1/2"	W <u> </u> X 334-60M	31	●	DSKM	N/A
	6'	71"	W <u> </u> X 334-72M	34	●	DSKM	N/A
	7'	79-3/4"	W <u> </u> X 334-84	36	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	W <u> </u> X 334-96	42	●		N/A
3-1/2' H	*3-1/2'	36-1/2"	W <u> </u> X 340-42M	23	●	DSKM	N/A
	4'	45"	W <u> </u> X 340-48M	27	●	DSKM	N/A
	*5'	62-1/2"	W <u> </u> X 340-60M	34	●	DSKM	N/A
	6'	71"	W <u> </u> X 340-72M	38	●	DSKM	N/A
	7'	79-3/4"	W <u> </u> X 340-84	39	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	W <u> </u> X 340-96	47	●		N/A
4' H	*3-1/2'	36-1/2"	W <u> </u> X 346-42M	28	●	DSKM	MAJ/BLK
	4'	45"	W <u> </u> X 346-48M	30	●	DSKM	CLS, MAJ, GEN/BLK
	*5'	62-1/2"	W <u> </u> X 346-60M	38	●	DSKM	CLS, MAJ, GEN/BLK
	6'	71"	W <u> </u> X 346-72M	42	●	DSKM	CLS, MAJ/BLK
	7'	79-3/4"	W <u> </u> X 346-84	44	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	W <u> </u> X 346-96	52	●		N/A
5' H	*3-1/2'	36-1/2"	W <u> </u> X 358-42M	32	●	DSKM	N/A
	4'	45"	W <u> </u> X 358-48M	35	●	DSKM	CLS, MAJ, GEN/BLK
	*5'	62-1/2"	W <u> </u> X 358-60M	44	●	DSKM	CLS, MAJ, GEN/BLK
	6'	71"	W <u> </u> X 358-72M	49	●	DSKM	CLS/BLK
	7'	79-3/4"	W <u> </u> X 358-84	51	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	W <u> </u> X 358-96	61	●		N/A
6' H	*3-1/2'	36-1/2"	W <u> </u> X 370-42M	37	●	DSKM	N/A
	4'	45"	W <u> </u> X 370-48M	40	●	DSKM	CLS, MAJ, GEN/BLK
	*5'	62-1/2"	W <u> </u> X 370-60M	50	●	DSKM	CLS, MAJ/BLK
	6'	71"	W <u> </u> X 370-72M	56	●	DSKM	CLS, MAJ/BLK
	7'	79-3/4"	W <u> </u> X 370-84	59	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	W <u> </u> X 370-96	70	●		N/A

Single Swing Gate Hardware Kit Includes (DSKM):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)

STYLE SELECTION = **X = COLOR SELECTION**
 CLASSIC = C **B = BLACK**
 MAJESTIC = M **N = BRONZE**
 GENESIS = G
 WARRIOR = W
 CRESCENT = L (3-1/2' & 5' OPENINGS NOT AVAILABLE)
 GEMINI = N/A IN 4" AIR GAP


NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15
7'	17 (18 IN CRESCENT)
8'	21

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
 Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

MONTAGE ATF®
DOUBLE SWING GATES



1-888-333-3422
FAX: 1-877-926-3747

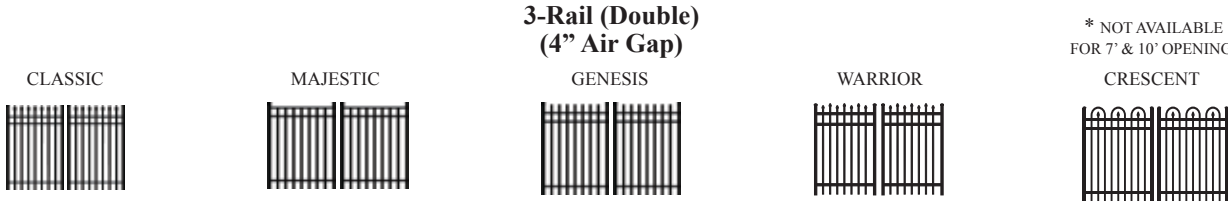

All Double Swing Gates include two (2) Gate Leaves .
All Double Swing Gates include hardware with the exception of 14' and 16'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	HDW KIT YES PART #	
3' H	*7'	36-1/2"	W <u> </u> <u>X</u> 334-84MD	44		•	N/A
	8'	45"	W <u> </u> <u>X</u> 334-96MD	50		•	DDKM
	*10'	62-1/2"	W <u> </u> <u>X</u> 334-120MD	64		•	DDKM
	12'	71"	W <u> </u> <u>X</u> 334-144MD	70		•	DDKM
	14'	79-3/4"	W <u> </u> <u>X</u> 334-168D	72	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u> </u> <u>X</u> 334-192D	84	•		N/A
3-1/2' H	*7'	36-1/2"	W <u> </u> <u>X</u> 340-84MD	48		•	N/A
	8'	45"	W <u> </u> <u>X</u> 340-96MD	56		•	DDKM
	*10'	62-1/2"	W <u> </u> <u>X</u> 340-120MD	66		•	DDKM
	12'	71"	W <u> </u> <u>X</u> 340-144MD	78		•	DDKM
	14'	79-3/4"	W <u> </u> <u>X</u> 340-168D	80	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u> </u> <u>X</u> 340-192D	94	•		N/A
4' H	*7'	36-1/2"	W <u> </u> <u>X</u> 346-84MD	56		•	MAJ/BLK
	8'	45"	W <u> </u> <u>X</u> 346-96MD	62		•	CLS, MAJ, GEN/BLK
	*10'	62-1/2"	W <u> </u> <u>X</u> 346-120MD	70		•	CLS, MAJ, GEN/BLK
	12'	71"	W <u> </u> <u>X</u> 346-144MD	86		•	CLS, MAJ/BLK
	14'	79-3/4"	W <u> </u> <u>X</u> 346-168D	88	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u> </u> <u>X</u> 346-192D	104	•		N/A
5' H	*7'	36-1/2"	W <u> </u> <u>X</u> 358-84MD	66		•	N/A
	8'	45"	W <u> </u> <u>X</u> 358-96MD	72		•	CLS, MAJ, GEN/BLK
	*10'	62-1/2"	W <u> </u> <u>X</u> 358-120MD	82		•	CLS, MAJ, GEN/BLK
	12'	71"	W <u> </u> <u>X</u> 358-144MD	100		•	CLS/BLK
	14'	79-3/4"	W <u> </u> <u>X</u> 358-168D	102	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u> </u> <u>X</u> 358-192D	122	•		N/A
6' H	*7'	36-1/2"	W <u> </u> <u>X</u> 370-84MD	76		•	N/A
	8'	45"	W <u> </u> <u>X</u> 370-96MD	82		•	CLS, MAJ, GEN/BLK
	*10'	62-1/2"	W <u> </u> <u>X</u> 370-120MD	94		•	CLS, MAJ/BLK
	12'	71"	W <u> </u> <u>X</u> 370-144MD	114		•	CLS, MAJ/BLK
	14'	79-3/4"	W <u> </u> <u>X</u> 370-168D	118	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W <u> </u> <u>X</u> 370-192D	140	•		N/A

Double Swing Gate Hardware Kit Includes (DDKM):
4 - KwikFit Pivoting Hinge (KFP)
1 - LokkLatch Key-Lockable Gate Latch (LLAAB)
1 - Q-Bolt Cane Bolt (QB124)

STYLE SELECTION = X = **COLOR SELECTION**
 CLASSIC = **C** **B** = BLACK
 MAJESTIC = **M** **N** = BRONZE
 GENESIS = **G**
 WARRIOR = **W**
 CRESCENT = **L** (7' & 10' OPENINGS NOT AVAILABLE)
 GEMINI = N/A IN 4" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15
7'	17 (18 IN CRESCENT)
8'	21


For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

**MONTAGE ATF®
SINGLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747

CLASSIC



MAJESTIC



3-Rail (Single)
(3" Air Gap)

GENESIS



GEMINI



All Single Swing Gates include hardware with the exception of 7' and 8'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	HDW KIT YES PART #	
3' H	3-1/2'	36-1/2"	R <u> </u> <u>X</u> 334-42M	23		●	DSKM N/A
	4'	45"	R <u> </u> <u>X</u> 334-48M	26		●	DSKM N/A
	5'	62-1/2"	R <u> </u> <u>X</u> 334-60M	33		●	DSKM N/A
	6'	71"	R <u> </u> <u>X</u> 334-72M	38		●	DSKM N/A
	7'	79-3/4"	R <u> </u> <u>X</u> 334-84	39	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	R <u> </u> <u>X</u> 334-96	46	●		N/A
3-1/2' H	3-1/2'	36-1/2"	R <u> </u> <u>X</u> 340-42M	25		●	DSKM N/A
	4'	45"	R <u> </u> <u>X</u> 340-48M	29		●	DSKM N/A
	5'	62-1/2"	R <u> </u> <u>X</u> 340-60M	36		●	DSKM N/A
	6'	71"	R <u> </u> <u>X</u> 340-72M	42		●	DSKM N/A
	7'	79-3/4"	R <u> </u> <u>X</u> 340-84	44	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	R <u> </u> <u>X</u> 340-96	51	●		N/A
4' H	3-1/2'	36-1/2"	R <u> </u> <u>X</u> 346-42M	30		●	DSKM N/A
	4'	45"	R <u> </u> <u>X</u> 346-48M	33		●	CLS, MAJ/BLK
	5'	62-1/2"	R <u> </u> <u>X</u> 346-60M	39		●	DSKM N/A
	6'	71"	R <u> </u> <u>X</u> 346-72M	47		●	DSKM N/A
	7'	79-3/4"	R <u> </u> <u>X</u> 346-84	49	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	R <u> </u> <u>X</u> 346-96	58	●		N/A
5' H	3-1/2'	36-1/2"	R <u> </u> <u>X</u> 358-42M	35		●	DSKM N/A
	4'	45"	R <u> </u> <u>X</u> 358-48M	39		●	DSKM N/A
	5'	62-1/2"	R <u> </u> <u>X</u> 358-60M	46		●	DSKM N/A
	6'	71"	R <u> </u> <u>X</u> 358-72M	55		●	DSKM N/A
	7'	79-3/4"	R <u> </u> <u>X</u> 358-84	58	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	R <u> </u> <u>X</u> 358-96	69	●		N/A
6' H	3-1/2'	36-1/2"	R <u> </u> <u>X</u> 370-42M	40		●	DSKM N/A
	4'	45"	R <u> </u> <u>X</u> 370-48M	45		●	DSKM N/A
	5'	62-1/2"	R <u> </u> <u>X</u> 370-60M	53		●	DSKM N/A
	6'	71"	R <u> </u> <u>X</u> 370-72M	63		●	DSKM N/A
	7'	79-3/4"	R <u> </u> <u>X</u> 370-84	67	●	See Hardware Section for Recommendation	N/A
	8'	96-1/2"	R <u> </u> <u>X</u> 370-96	79	●		N/A

Single Swing Gate Hardware Kit Includes (DSKM):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)

STYLE SELECTION = X = **COLOR SELECTION**
 CLASSIC = C B = BLACK
 MAJESTIC = M N = BRONZE
 GENESIS = G
 GEMINI = H
 WARRIOR = N/A IN 3" AIR GAP
 CRESCENT = N/A IN 3" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	9 (10 IN GEMINI)
4'	11 (12 IN GEMINI)
5'	16
6'	19 (18 IN GEMINI)
7'	21 (22 IN GEMINI)
8'	26

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
 Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

MONTAGE ATF®
DOUBLE SWING GATES



1-888-333-3422
FAX: 1-877-926-3747

3-Rail (Double)
(3" Air Gap)



All Double Swing Gates include two (2) Gate Leafs .
All Double Swing Gates include hardware with the exception of 14' and 16'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	HDW KIT YES PART #	
3' H	7'	36-1/2"	R <u> </u> <u>X</u> 334-84MD	48		•	DDKM N/A
	8'	45"	R <u> </u> <u>X</u> 334-96MD	54		•	DDKM N/A
	10'	62-1/2"	R <u> </u> <u>X</u> 334-120MD	68		•	DDKM N/A
	12'	71"	R <u> </u> <u>X</u> 334-144MD	78		•	DDKM N/A
	14'	79-3/4"	R <u> </u> <u>X</u> 334-168D	80	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R <u> </u> <u>X</u> 334-192D	92	•		N/A
3-1/2' H	7'	36-1/2"	R <u> </u> <u>X</u> 340-84MD	52		•	DDKM N/A
	8'	45"	R <u> </u> <u>X</u> 340-96MD	60		•	DDKM N/A
	10'	62-1/2"	R <u> </u> <u>X</u> 340-120MD	74		•	DDKM N/A
	12'	71"	R <u> </u> <u>X</u> 340-144MD	86		•	DDKM N/A
	14'	79-3/4"	R <u> </u> <u>X</u> 340-168D	88	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R <u> </u> <u>X</u> 340-192D	102	•		N/A
4' H	7'	36-1/2"	R <u> </u> <u>X</u> 346-84MD	62		•	DDKM N/A
	8'	45"	R <u> </u> <u>X</u> 346-96MD	68		•	DDKM CLS, MAJ/BLK
	10'	62-1/2"	R <u> </u> <u>X</u> 346-120MD	80		•	DDKM N/A
	12'	71"	R <u> </u> <u>X</u> 346-144MD	96		•	DDKM N/A
	14'	79-3/4"	R <u> </u> <u>X</u> 346-168D	98	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R <u> </u> <u>X</u> 346-192D	116	•		N/A
5' H	7'	36-1/2"	R <u> </u> <u>X</u> 358-84MD	72		•	DDKM N/A
	8'	45"	R <u> </u> <u>X</u> 358-96MD	80		•	DDKM N/A
	10'	62-1/2"	R <u> </u> <u>X</u> 358-120MD	94		•	DDKM N/A
	12'	71"	R <u> </u> <u>X</u> 358-144MD	112		•	DDKM N/A
	14'	79-3/4"	R <u> </u> <u>X</u> 358-168D	116	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R <u> </u> <u>X</u> 358-192D	138	•		N/A
6' H	7'	36-1/2"	R <u> </u> <u>X</u> 370-84MD	82		•	DDKM N/A
	8'	45"	R <u> </u> <u>X</u> 370-96MD	92		•	DDKM N/A
	10'	62-1/2"	R <u> </u> <u>X</u> 370-120MD	108		•	DDKM N/A
	12'	71"	R <u> </u> <u>X</u> 370-144MD	130		•	DDKM N/A
	14'	79-3/4"	R <u> </u> <u>X</u> 370-168D	134	•	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	R <u> </u> <u>X</u> 370-192D	158	•		N/A

STYLE SELECTION = * X = **COLOR SELECTION**
 CLASSIC = C B = BLACK
 MAJESTIC = M N = BRONZE
 GENESIS = G
 GEMINI = H
 WARRIOR = N/A IN 3" AIR GAP
 CRESCENT = N/A IN 3" AIR GAP

Double Swing Gate Hardware Kit Includes (DDKM):
 4 – KwikFit Pivoting Hinge (KFP)
 1 – LokkLatch Key-Lockable Gate Latch (LLAAB)
 1 – Q-Bolt Cane Bolt (QB124)

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	9 (10 IN GEMINI)
4'	11 (12 IN GEMINI)
5'	16
6'	19 (18 IN GEMINI)
7'	21 (22 IN GEMINI)
8'	26

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

MONTAGE ATF®
SINGLE SWING GATES



1-888-333-3422
FAX: 1-877-926-3747

3-Rail (Single Flush Bottom)
(4" Air Gap)

* NOT AVAILABLE
FOR 3-1/2' & 5' OPENINGS



All Single Swing Gates include hardware with the exception of 7' and 8'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE SUPPLIED		HDW KIT PART #	STOCKING STYLE/COLOR
					NO	YES		
3' H	3-1/2'	36-1/2"	W * X 334F-42M	22		•	DSKM	N/A
	4'	45"	W * X 334F-48M	24		•	DSKM	N/A
	5'	62-1/2"	W * X 334F-60M	31		•	DSKM	N/A
	6'	71"	W * X 334F-72M	34		•	DSKM	N/A
	7'	79-3/4"	W * X 334F-84	36	•	See Hardware Section for Recommendation		N/A
3-1/2' H	3-1/2'	36-1/2"	W * X 340F-42M	24		•	DSKM	N/A
	4'	45"	W * X 340F-48M	27		•	DSKM	N/A
	5'	62-1/2"	W * X 340F-60M	34		•	DSKM	N/A
	6'	71"	W * X 340F-72M	38		•	DSKM	N/A
	7'	79-3/4"	W * X 340F-84	39	•	See Hardware Section for Recommendation		N/A
4' H	3-1/2'	36-1/2"	W * X 346F-42M	27		•	DSKM	N/A
	4'	45"	W * X 346F-48M	30		•	DSKM	MAJ/BLK
	5'	62-1/2"	W * X 346F-60M	38		•	DSKM	N/A
	6'	71"	W * X 346F-72M	42		•	DSKM	N/A
	7'	79-3/4"	W * X 346F-84	44	•	See Hardware Section for Recommendation		N/A
*4-1/2' H (MAJESTIC POOL ONLY)	3-1/2'	36-1/2"	W M X 354F-42P	31		•	DSKM	N/A
	4'	45"	W M X 354F-48P	34		•	DSKM	N/A
	5'	62-1/2"	W M X 354F-60P	42		•	DSKM	N/A
	6'	71"	W M X 354F-72P	47		•	DSKM	N/A
	7'	79-3/4"	W M X 354F-84	48	•	See Hardware Section for Recommendation		N/A
5' H	3-1/2'	36-1/2"	W * X 358F-42M	32		•	DSKM	N/A
	4'	45"	W * X 358F-48M	35		•	DSKM	CLS, MAJ/BLK
	5'	62-1/2"	W * X 358F-60M	44		•	DSKM	MAJ/BLK
	6'	71"	W * X 358F-72M	49		•	DSKM	N/A
	7'	79-3/4"	W * X 358F-84	51	•	See Hardware Section for Recommendation		N/A
6' H	3-1/2'	36-1/2"	W * X 370F-42M	37		•	DSKM	N/A
	4'	45"	W * X 370F-48M	40		•	DSKM	MAJ/BLK
	5'	62-1/2"	W * X 370F-60M	50		•	DSKM	N/A
	6'	71"	W * X 370F-72M	56		•	DSKM	N/A
	7'	79-3/4"	W * X 370F-84	59	•	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	W * X 370F-96	70	•	See Hardware Section for Recommendation		N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - LokkLatch Key-Lockable Gate Latch (LLAAB)

Single Swing Gate Hardware Kit Includes (DSKP):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - MagnaLatch Top Pull Gate Latch (MLTPS2BGA)

CLASSIC = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G
WARRIOR = W
CRESCENT = L (3-1/2' & 5' OPENINGS NOT AVAILABLE)
GEMINI = N/A IN 4" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15
7'	17 (18 IN CRESCENT)
8'	21

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.


MONTAGE ATF®
DOUBLE SWING GATES



1-888-333-3422
FAX: 1-877-926-3747

3-Rail (Double Flush Bottom)
(4" Air Gap)

* NOT AVAILABLE
FOR 7' & 10' OPENINGS
CRESCENT



All Double Swing Gates include two (2) Gate Leafs.
All Double Swing Gates include hardware with the exception of 14' and 16'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE SUPPLIED		HDW KIT PART #	STOCKING STYLE/COLOR
					NO	YES		
3' H	7'	36-1/2"	W * X 334F-84MD	44		●	DDKM	N/A
	8'	45"	W * X 334F-96MD	50		●	DDKM	N/A
	10'	62-1/2"	W * X 334F-120MD	64		●	DDKM	N/A
	12'	71"	W * X 334F-144MD	70		●	DDKM	N/A
	14'	79-3/4"	W * X 334F-168D	72	●	●	See Hardware Section for Recommendation	N/A
3-1/2' H	7'	36-1/2"	W * X 340F-84MD	48		●	DDKM	N/A
	8'	45"	W * X 340F-96MD	56		●	DDKM	N/A
	10'	62-1/2"	W * X 340F-120MD	66		●	DDKM	N/A
	12'	71"	W * X 340F-144MD	78		●	DDKM	N/A
	14'	79-3/4"	W * X 340F-168D	78	●	●	See Hardware Section for Recommendation	N/A
4' H	7'	36-1/2"	W * X 346F-84 MD	56		●	DDKM	N/A
	8'	45"	W * X 346F-96MD	62		●	DDKM	MAJ/BLK
	10'	62-1/2"	W * X 346F-120MD	70		●	DDKM	N/A
	12'	71"	W * X 346F-144MD	86		●	DDKM	N/A
	14'	79-3/4"	W * X 346F-168D	88	●	●	See Hardware Section for Recommendation	N/A
*4-1/2' H (MAJESTIC ONLY)	7'	36-1/2"	W M X 354F-84MD	62		●	DDKM	N/A
	8'	45"	W M X 354F-96MD	68		●	DDKM	N/A
	10'	62-1/2"	W M X 354F-120MD	76		●	DDKM	N/A
	12'	71"	W M X 354F-144MD	94		●	DDKM	N/A
	14'	79-3/4"	W M X 354F-168D	96	●	●	See Hardware Section for Recommendation	N/A
5' H	7'	36-1/2"	W * X 358F-84MD	66		●	DDKM	N/A
	8'	45"	W * X 358F-96MD	72		●	DDKM	CLS, MAJ/BLK
	10'	62-1/2"	W * X 358F-120MD	82		●	DDKM	MAJ/BLK
	12'	71"	W * X 358F-144MD	100		●	DDKM	N/A
	14'	79-3/4"	W * X 358F-168D	102	●	●	See Hardware Section for Recommendation	N/A
6' H	7'	36-1/2"	W * X 370F-84MD	76		●	DDKM	N/A
	8'	45"	W * X 370F-96MD	82		●	DDKM	MAJ/BLK
	10'	62-1/2"	W * X 370F-120MD	94		●	DDKM	N/A
	12'	71"	W * X 370F-144MD	114		●	DDKM	N/A
	14'	79-3/4"	W * X 370F-168D	118	●	●	See Hardware Section for Recommendation	N/A
	16'	96-1/2"	W * X 370F-192D	140	●	●	See Hardware Section for Recommendation	N/A

STYLE SELECTION = * X = COLOR SELECTION

Double Swing Gate Hardware Kit Includes (DDKM):
4 – KwikFit Pivoting Hinge (KFP)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)
1 – Q-Bolt Cane Bolt (QB124)

CLASSIC = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G
WARRIOR = W
CRESCENT = L (7' & 10' OPENINGS NOT AVAILABLE)
GEMINI = N/A IN 4" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15
7'	17 (18 IN CRESCENT)
8'	21

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

MONTAGE ATF®
SINGLE SWING GATES



1-888-333-3422
FAX: 1-877-926-3747

CLASSIC



MAJESTIC




3-Rail (Single Flush Bottom)
(3" Air Gap)

GENESIS



GEMINI



All Single Swing Gates include hardware with the exception of 7' and 8'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE SUPPLIED		HDW KIT PART #	STOCKING STYLE/COLOR
					NO	YES		
3' H	3-1/2'	36-1/2"	R * X 334F-42M	23		●	DSKM	N/A
	4'	45"	R * X 334F-48M	26		●	DSKM	N/A
	5'	62-1/2"	R * X 334F-60M	33		●	DSKM	N/A
	6'	71"	R * X 334F-72M	38		●	DSKM	N/A
	7'	79-3/4"	R * X 334F-84	39	●	See Hardware Section for Recommendation		N/A
3-1/2' H	3-1/2'	36-1/2"	R * X 340F-42M	25		●	DSKM	N/A
	4'	45"	R * X 340F-48M	29		●	DSKM	N/A
	5'	62-1/2"	R * X 340F-60M	36		●	DSKM	N/A
	6'	71"	R * X 340F-72M	42		●	DSKM	N/A
	7'	79-3/4"	R * X 340F-84	44	●	See Hardware Section for Recommendation		N/A
4' H	3-1/2'	36-1/2"	R * X 346F-42M	30		●	DSKM	N/A
	4'	45"	R * X 346F-48M	33		●	DSKM	N/A
	5'	62-1/2"	R * X 346F-60M	39		●	DSKM	N/A
	6'	71"	R * X 346F-72M	47		●	DSKM	N/A
	7'	79-3/4"	R * X 346F-84	49	●	See Hardware Section for Recommendation		N/A
*4-1/2' H (MAJESTIC ONLY)	3-1/2'	36-1/2"	R M X 354F-42P	34		●	DSKP	N/A
	4'	45"	R M X 354F-48P	37		●	DSKP	N/A
	5'	62-1/2"	R M X 354F-60P	44		●	DSKP	N/A
	6'	71"	R M X 354F-72P	54		●	DSKP	N/A
	7'	79-3/4"	R M X 354F-84	54	●	See Hardware Section for Recommendation		N/A
5' H	3-1/2'	36-1/2"	R * X 358F-42M	35		●	DSKM	N/A
	4'	45"	R * X 358F-48M	39		●	DSKM	N/A
	5'	62-1/2"	R * X 358F-60M	46		●	DSKM	N/A
	6'	71"	R * X 358F-72M	55		●	DSKM	N/A
	7'	79-3/4"	R * X 358F-84	58	●	See Hardware Section for Recommendation		N/A
6' H	3-1/2'	36-1/2"	R * X 370F-42M	40		●	DSKM	N/A
	4'	45"	R * X 370F-48M	45		●	DSKM	N/A
	5'	62-1/2"	R * X 370F-60M	53		●	DSKM	N/A
	6'	71"	R * X 370F-72M	63		●	DSKM	N/A
	7'	79-3/4"	R * X 370F-84	67	●	See Hardware Section for Recommendation		N/A
	8'	96-1/2"	R * X 370F-96	79	●	See Hardware Section for Recommendation		N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - LokkLatch Key-Lockable Gate Latch (LLAAB)

Single Swing Gate Hardware Kit Includes (DSKP):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - MagnaLatch Top Pull Gate Latch (MLTPS2BGA)

CLASSIS = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G
GEMINI = H
WARRIOR = N/A IN 3" AIR GAP
CRESCENT = N/A IN 3" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	9 (10 IN GEMINI)
4'	11 (12 IN GEMINI)
5'	16
6'	19 (18 IN GEMINI)
7'	21 (22 IN GEMINI)
8'	26

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

**MONTAGE ATF®
DOUBLE SWING GATES**



1-888-333-3422
FAX: 1-877-926-3747

**3-Rail (Double Flush Bottom)
(3" Air Gap)**



All Double Swing Gates include two (2) Gate Leafs .
All Double Swing Gates include hardware with the exception of 14' and 16'.

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	YES	
3' H	7'	36-1/2"	R * <u>X</u> 334F-84MD	48		●	DDKM N/A
	8'	45"	R * <u>X</u> 334F-96MD	54		●	DDKM N/A
	10'	62-1/2"	R * <u>X</u> 334F-120MD	68		●	DDKM N/A
	12'	71"	R * <u>X</u> 334F-144MD	78		●	DDKM N/A
	14'	79-3/4"	R * <u>X</u> 334F-168D	80	●	●	See Hardware Section for Recommendation N/A
	16'	96-1/2"	R * <u>X</u> 334F-192D	92	●	●	See Hardware Section for Recommendation N/A
3-1/2' H	7'	36-1/2"	R * <u>X</u> 340F-84MD	52		●	DDKM N/A
	8'	45"	R * <u>X</u> 340F-96MD	60		●	DDKM N/A
	10'	62-1/2"	R * <u>X</u> 340F-120MD	74		●	DDKM N/A
	12'	71"	R * <u>X</u> 340F-144MD	86		●	DDKM N/A
	14'	79-3/4"	R * <u>X</u> 340F-168D	88	●	●	See Hardware Section for Recommendation N/A
	16'	96-1/2"	R * <u>X</u> 340F-192D	102	●	●	See Hardware Section for Recommendation N/A
4' H	7'	36-1/2"	R * <u>X</u> 346F-84MD	62		●	DDKM N/A
	8'	45"	R * <u>X</u> 346F-96MD	68		●	DDKM N/A
	10'	62-1/2"	R * <u>X</u> 346F-120MD	80		●	DDKM N/A
	12'	71"	R * <u>X</u> 346F-144MD	96		●	DDKM N/A
	14'	79-3/4"	R * <u>X</u> 346F-168D	98	●	●	See Hardware Section for Recommendation N/A
	16'	96-1/2"	R * <u>X</u> 346F-192D	116	●	●	See Hardware Section for Recommendation N/A
*4-1/2' H (MAJESTIC ONLY)	7'	36-1/2"	R M <u>X</u> 354F-84MD	68		●	DDKM N/A
	8'	45"	R M <u>X</u> 354F-96MD	74		●	DDKM N/A
	10'	62-1/2"	R M <u>X</u> 354F-120MD	88		●	DDKM N/A
	12'	71"	R M <u>X</u> 354F-144MD	108		●	DDKM N/A
	14'	79-3/4"	R M <u>X</u> 354F-168D	110	●	●	See Hardware Section for Recommendation N/A
	16'	96-1/2"	R M <u>X</u> 354F-192D	128	●	●	See Hardware Section for Recommendation N/A
5' H	7'	36-1/2"	R * <u>X</u> 358F-84MD	72		●	DDKM N/A
	8'	45"	R * <u>X</u> 358F-96MD	80		●	DDKM N/A
	10'	62-1/2"	R * <u>X</u> 358F-120MD	94		●	DDKM N/A
	12'	71"	R * <u>X</u> 358F-144MD	112		●	DDKM N/A
	14'	79-3/4"	R * <u>X</u> 358F-168D	116	●	●	See Hardware Section for Recommendation N/A
	16'	96-1/2"	R * <u>X</u> 358F-192D	138	●	●	See Hardware Section for Recommendation N/A
6' H	7'	36-1/2"	R * <u>X</u> 370F-84MD	82		●	DDKM N/A
	8'	45"	R * <u>X</u> 370F-96MD	92		●	DDKM N/A
	10'	62-1/2"	R * <u>X</u> 370F-120MD	108		●	DDKM N/A
	12'	71"	R * <u>X</u> 370F-144MD	130		●	DDKM N/A
	14'	79-3/4"	R * <u>X</u> 370F-168D	134	●	●	See Hardware Section for Recommendation N/A
	16'	96-1/2"	R * <u>X</u> 370F-192D	158	●	●	See Hardware Section for Recommendation N/A

STYLE SELECTION = * X = COLOR SELECTION

Double Swing Gate Hardware Kit Includes (DDKM):
4 – KwikFit Pivoting Hinge (KFP)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)
1 – Q-Bolt Cane Bolt (QB124)

CLASSIS = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G
GEMINI = H
WARRIOR = N/A IN 3" AIR GAP
CRESCENT = N/A IN 3" AIR GAP

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	9 (10 IN GEMINI)
4'	11 (12 IN GEMINI)
5'	16
6'	19 (18 IN GEMINI)
7'	21 (22 IN GEMINI)
8'	26

For gate leaves more than 6 feet in width, gusset straps are welded in all four corners, an intermediate upright is added in the center of the leaf and truss cables are provided for added strength.
Note: Custom gate leaf widths are available upon request, but would incur a 10% engineering charge based on the nearest larger standard gate leaf width.

MONTAGE ATF® ARCHED SINGLE SWING GATES



1-888-333-3422
FAX: 1-877-926-3747

2-Rail (Single Arched)
(4" Air Gap)

CLASSIC



MAJESTIC



GENESIS



All Single Swing Gates include hardware

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR	
					SUPPLIED NO	YES HDW KIT PART #		
3' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 234-42AM	20		●	DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 234-48AM	24		●	DSKM	N/A
	5'	62-1/2"	W <u></u> <u>X</u> 234-60AM	29		●	DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 234-72AM	33		●	DSKM	N/A
3-1/2' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 240-42AM	22		●	DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 240-48AM	26		●	DSKM	N/A
	5'	62-1/2"	W <u></u> <u>X</u> 240-60AM	33		●	DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 240-72AM	38		●	DSKM	N/A
4' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 246-42AM	26		●	DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 246-48AM	29		●	DSKM	N/A
	5'	62-1/2"	W <u></u> <u>X</u> 246-60AM	36		●	DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 246-72AM	39		●	DSKM	N/A
5' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 258-42AM	41		●	DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 258-48AM	34		●	DSKM	N/A
	5'	62-1/2"	W <u></u> <u>X</u> 258-60AM	40		●	DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 258-72AM	46		●	DSKM	N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - LokkLatch Key-Lockable Gate Latch (LLAAB)

CLASSIC = **C** **B** = BLACK
MAJESTIC = **M** **N** = BRONZE
GENESIS = **G**

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15

All gates are supplied with 2 ea. TruClose Mini-Multi Adjust Hinge (TCAMA1) and 1 ea. LokkLatch (LLAAB)

MONTAGE ATF® ARCHED SINGLE SWING GATES

1-888-333-3422
FAX: 1-877-926-3747

2-Rail (Single Flush Bottom)
(4" Air Gap)



All Single Swing Gates include hardware

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE SUPPLIED		HDW KIT PART #	STOCKING STYLE/COLOR
					NO	YES		
3' H	3-1/2'	36-1/2"	W * <u>X</u> 234F-42AM	20		●	DSKM	N/A
	4'	45"	W * <u>X</u> 234F-48AM	25		●	DSKM	N/A
	*5'	62-1/2"	W * <u>X</u> 234F-60AM	29		●	DSKM	N/A
	6'	71"	W * <u>X</u> 234F-72AM	33		●	DSKM	N/A
3-1/2' H	3-1/2'	36-1/2"	W * <u>X</u> 240F-42AM	31		●	DSKM	N/A
	4'	45"	W * <u>X</u> 240F-48AM	26		●	DSKM	N/A
	5'	62-1/2"	W * <u>X</u> 240F-60AM	33		●	DSKM	N/A
	6'	71"	W * <u>X</u> 240F-72AM	37		●	DSKM	N/A
4' H	3-1/2'	36-1/2"	W * <u>X</u> 246F-42AM	26		●	DSKM	N/A
	4'	45"	W * <u>X</u> 246F-48AM	29		●	DSKM	N/A
	5'	62-1/2"	W * <u>X</u> 246F-60AM	36		●	DSKM	N/A
	6'	71"	W * <u>X</u> 246F-72AM	39		●	DSKM	N/A
4' H (MAJESTIC POOL ONLY)	3-1/2'	36-1/2"	W M <u>X</u> 246F-42AP	26		●	DSKP	N/A
	4'	45"	W M <u>X</u> 246F-48AP	29		●	DSKP	N/A
	5'	62-1/2"	W M <u>X</u> 246F-60AP	36		●	DSKP	N/A
	6'	71"	W M <u>X</u> 246F-72AP	39		●	DSKP	N/A
5' H	3-1/2'	36-1/2"	W * <u>X</u> 258F-42AM	41		●	DSKM	N/A
	4'	45"	W * <u>X</u> 258F-48AM	34		●	DSKM	N/A
	5'	62-1/2"	W * <u>X</u> 258F-60AM	40		●	DSKM	N/A
	6'	71"	W * <u>X</u> 258F-72AM	46		●	DSKM	N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - LokkLatch Key-Lockable Gate Latch (LLAAB)

CLASSIC = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G

Single Swing Gate Hardware Kit Includes (DSKP):
2 - TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 - MagnaLatch Top Pull Gate Latch (MLTPS2BGA)

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15

All gates except for pool gates are supplied with 2 ea. TruClose Mini-Multi Adjust Hinge (TCAMA1) and 1 ea. LokkLatch (LLAAB).
Pool gates are supplied with 2 ea. TruClose Mini-Multi Adjust Hinge (TCAMA1) and 1 ea. MagnaLatch Top Pull (MLTPS-2PGA).

MONTAGE ATF® ARCHED SINGLE SWING GATES

1-888-333-3422
FAX: 1-877-926-3747

3-Rail (Single Arched) (4" Air Gap)



CLASSIC



MAJESTIC



GENESIS

All Single Swing Gates include hardware

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	YES HDW KIT PART #	
3' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 334-42AM	22		• DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 334-48AM	26		• DSKM	N/A
	5'	62-1/2"	W <u>*</u> <u>X</u> 334-60AM	33		• DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 334-72AM	37		• DSKM	N/A
3-1/2' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 340-42AM	24		• DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 340-48AM	29		• DSKM	N/A
	5'	62-1/2"	W <u>*</u> <u>X</u> 340-60AM	36		• DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 340-72AM	41		• DSKM	N/A
4' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 346-42AM	28		• DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 346-48AM	32		• DSKM	N/A
	5'	62-1/2"	W <u>*</u> <u>X</u> 346-60AM	40		• DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 346-72AM	45		• DSKM	N/A
5' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 358-42AM	33		• DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 358-48AM	37		• DSKM	N/A
	5'	62-1/2"	W <u>*</u> <u>X</u> 358-60AM	46		• DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 358-72AM	52		• DSKM	N/A
6' H	3-1/2'	36-1/2"	W <u>*</u> <u>X</u> 370-42AM	38		• DSKM	N/A
	4'	45"	W <u>*</u> <u>X</u> 370-48AM	42		• DSKM	N/A
	5'	62-1/2"	W <u>*</u> <u>X</u> 370-60AM	52		• DSKM	N/A
	6'	71"	W <u>*</u> <u>X</u> 370-72AM	59		• DSKM	N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)

CLASSIC = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G

NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15

All gates are supplied with 2 ea. TruClose Mini-Multi Adjust Hinge (TCAMA1) and 1 ea. LokkLatch (LLAAB)

MONTAGE ATF®



1-888-333-3422
FAX: 1-877-926-3747

ARCHED SINGLE SWING GATES

3-Rail (Single Flush Bottom)
(4" Air Gap)



All Single Swing Gates include hardware

(NOMINAL) GATE HEIGHT	(NOMINAL) GATE OPENING	(ACTUAL) GATE LEAF WIDTH	ITEM NUMBER	GATE WEIGHT	HARDWARE		STOCKING STYLE/COLOR
					SUPPLIED NO	HDW KIT YES PART #	
3' H	3-1/2'	36-1/2"	W * X 334F-42 AM	23		• DSKM	N/A
	4'	45"	W * X 334F-48AM	26		• DSKM	N/A
	5'	62-1/2"	W * X 334F-60AM	33		• DSKM	N/A
	6'	71"	W * X 334F-72AM	37		• DSKM	N/A
3-1/2' H	3-1/2'	36-1/2"	W * X 340F-42AM	23		• DSKM	N/A
	4'	45"	W * X 340F-48AM	29		• DSKM	N/A
	5'	62-1/2"	W * X 340F-60AM	36		• DSKM	N/A
	6'	71"	W * X 340F-72AM	41		• DSKM	N/A
4' H	3-1/2'	36-1/2"	W * X 346F-42AM	28		• DSKM	N/A
	4'	45"	W * X 346F-48AM	32		• DSKM	N/A
	5'	62-1/2"	W * X 346F-60AM	40		• DSKM	N/A
	6'	71"	W * X 346F-72AM	45		• DSKM	N/A
*4-1/2' H (MAJESTIC POOL ONLY)	3-1/2'	36-1/2"	W M X 354F-42AP	24		• DSKP	N/A
	4'	45"	W M X 354F-48AP	36		• DSKP	N/A
	5'	62-1/2"	W M X 354F-60AP	44		• DSKP	N/A
	6'	71"	W M X 354F-72AP	50		• DSKP	N/A
5' H	3-1/2'	36-1/2"	W * X 358F-42 AM	33		• DSKM	N/A
	4'	45"	W * X 358F-48AM	37		• DSKM	N/A
	5'	62-1/2"	W * X 358F-60AM	46		• DSKM	N/A
	6'	71"	W * X 358F-72AM	52		• DSKM	N/A
6' H	3-1/2'	36-1/2"	W * X 370F-42AM	38		• DSKM	N/A
	4'	45"	W * X 370F-48AM	42		• DSKM	N/A
	5'	62-1/2"	W * X 370F-60AM	52		• DSKM	N/A
	6'	71"	W * X 370F-72AM	59		• DSKM	N/A

STYLE SELECTION = * X = COLOR SELECTION

Single Swing Gate Hardware Kit Includes (DSKM):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – LokkLatch Key-Lockable Gate Latch (LLAAB)

CLASSIC = C B = BLACK
MAJESTIC = M N = BRONZE
GENESIS = G

Single Swing Gate Hardware Kit Includes (DSKP):
2 – TruClose Mini-Multi Adjust Hinges (TCAMA1)
1 – MagnaLatch Top Pull Gate Latch (MLTPS2BGA)



NOMINAL GATE OPENING	PICKET QUANTITY
3-1/2'	7
4'	9
5'	13
6'	15

All gates except for pool gates are supplied with 2 ea. TruClose Mini-Multi Adjust Hinge (TCAMA1) and 1 ea. LokkLatch (LLAAB).
Pool gates are supplied with 2 ea. TruClose Mini-Multi Adjust Hinge (TCAMA1) and 1 ea. MagnaLatch Top Pull (MLTPS-2PGA).

MONTAGE ATF® GATE KITS




1-888-333-3422
FAX: 1-877-926-3747

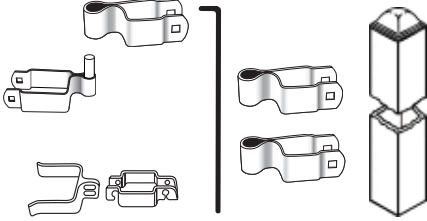ITEM DESCRIPTION	SWING TYPE	(NOMINAL)	(ACTUAL)	ITEM NUMBER	WEIGHT
		PANEL HEIGHT	GATE END LENGTH		
Montage Single Swing Gate Kit 	SINGLE SWING KITS	4' H	46"	W <u>X</u> 46-WG	14
		5' H	58"	W <u>X</u> 58-WG	16
		6' H	70"	W <u>X</u> 70-WG	18
	Single Walk Gate (WG) Kit includes: 2 - Gate Ends - 1-1/4" Square 2 - Female Frame Hinges - 1-1/4" 2 - Male Post Hinges - 2" 1 - Latch Fork - 2" 1 - Latch Collar - 1-1/4"				X = COLOR SELECTION B = BLACK N = BRONZE
Montage Double Swing Gate Kit 	DOUBLE SWING KITS	4' H	46"	W <u>X</u> 46-DD	32
		5' H	58"	W <u>X</u> 58-DD	36
		6' H	70"	W <u>X</u> 70-DD	40
	Double Drive (DD) Kit includes: 4 - Gate Ends - 1-1/4" Square 6 - Female Frame Hinges - 1-1/4" 4 - Male Post Hinges - 2" 1 - Latch Fork - 1-1/4" 1 - Latch Collar - 1-1/4" 1 - Cane Bolt - 48"				X = COLOR SELECTION B = BLACK N = BRONZE
Note: Kits intended for use with Majestic Flush Bottom panels should be purchased one foot taller than the panel height.					

NOTE: Gates fabricated by welding of gate ends to panel remnants are excluded from the welded fence warranty.

GATE ENDS

ITEM DESCRIPTION	PART NUMBER/COLOR		LENGTH	BOX QTY	WT EA
	BLACK	BRONZE			
1-1/4" Sq. x 16 Ga. Steel Gate End 	HB234	HN234	1-1/4" x 34"	8	2.90
	HB240	HN240	1-1/4" x 40"	8	3.45
	HB246	HN246	1-1/4" x 46"	8	3.83
	HB248	HN248	1-1/4" x 48"	8	4.00
	HB258	HN258	1-1/4" x 58"	8	4.95
	HB259	HN259	1-1/4" x 59"	8	5.05
	HB270	HN270	1-1/4" x 70"	8	6.00
	HB271	HN271	1-1/4" x 71"	8	6.30
NOTE: Gate Ends are supplied with 1-1/4" Sq. PVC caps.					

